

SERIES FN 35/15, FKN 35/15, FTN 35/15


FOR FLOORS – SURFACE FIXING

EXPANSION JOINT SYSTEMS

■ **INSERT REPLACEABLE AT ANY TIME**

■ **PROFILE FKN 35/15 3 MM HIGH UPSTAND CAN BE WELDED TO PVC-COVERINGS**

■ **PROFILE FTN 35/15 5 MM HIGH UPSTAND HIGH QUALITY ELASTOMERIC INSERT IN CONJUNCTION WITH CARPETS**

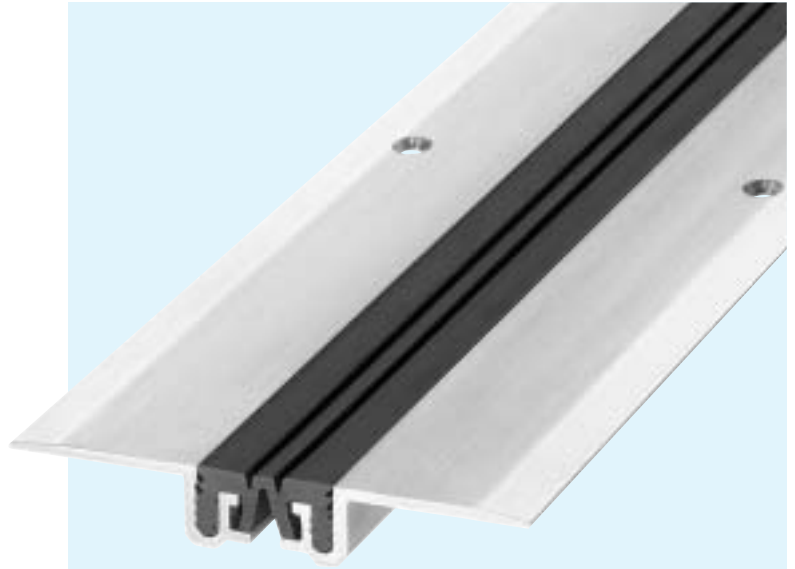


TECHNICAL DATA

Profile	for PVC-coverings mm thickness	for carpets mm thickness	Joint width min. mm	Total movement mm	Visible width of Profile mm	Installation depth mm	Thickness of- alu side plates mm	Load capacity
FN 35/15	–	–	35	10 +/-5	112	13	2	Pedestrians,
FKN 35/15	3	–	35	10 +/-5	30	2	light vehicles	
FTN 35/15	–	5	35	10 +/-5	30	13	2	on request

MATERIAL


Aluminium side plates with flexible high quality elastomeric insert, long wearing, weather resistant, temperature resistant (-30°C to +120°C), extensively resistant to oils, acids and bitumen
Profile FKN 35/15 with insert made of modified PVC, can be welded to PVC-coverings

Production length: 4 m
Standard colours: black, grey, beige, brown
Corner versions: page 36

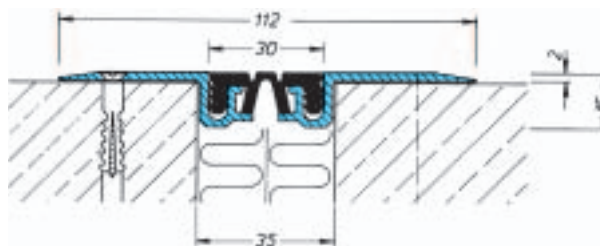


FN 35/15

Scale 1 : 2

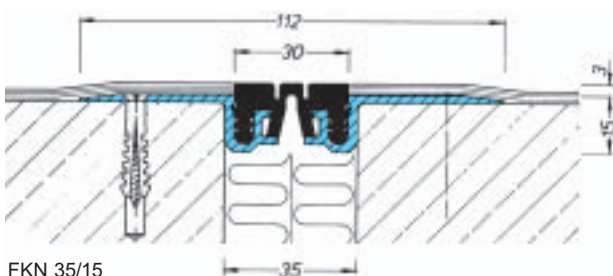

FKN 35/15

Scale 1 : 2

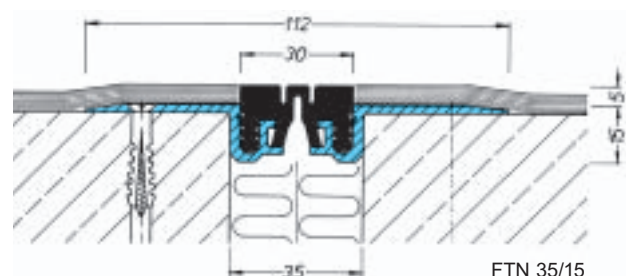

FTN 35/15