


SERIES FN 50/20, FN 65/20, FN 90/20

FOR FLOORS – SURFACE FIXING

EXPANSION JOINT SYSTEMS

- INSERT REPLACEABLE AT ANY TIME
- PROFILE ABSORBS SETTLEMENTS
- HIGH LOAD RESISTANCE OF FLEXIBLE HIGH QUALITY ELASTOMERIC INSERT DUE TO CENTRE SUPPORT

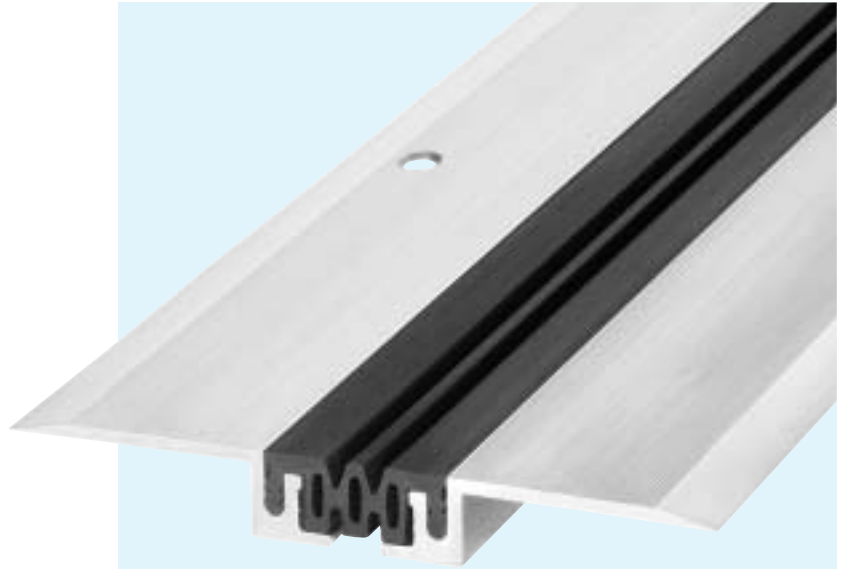

TECHNICAL DATA


Profile	Joint width min. mm	Total movement mm	Width of insert mm	Total width of profile mm	Installation depth mm	Thickness of alu side plates mm	Load capacity
FN 50/20	50	16 +/- 8	43	170	16	3	Pedestrians,
FN 65/20	65	25 +/- 9	56	185	18	4	light vehicles
FN 90/20	90	30 +/- 12	80	210	18	4	on request

MATERIAL

Aluminium side plates with flexible high quality elastomeric insert, long wearing, weather resistant, temperature resistant (-30°C to +120°C), extensively resistant to oils, acids and bitumen.
Production length: 4 m


Standard colours: black, grey, Corner versions: page 36–37

The profile FN 50/20 is also available with a 3 mm high upstand Insert as **FKN 50/20**.
Profile FKN 50/20: Production length: 4 m, Standard colours: black, brown, **Upstand: 3 mm**

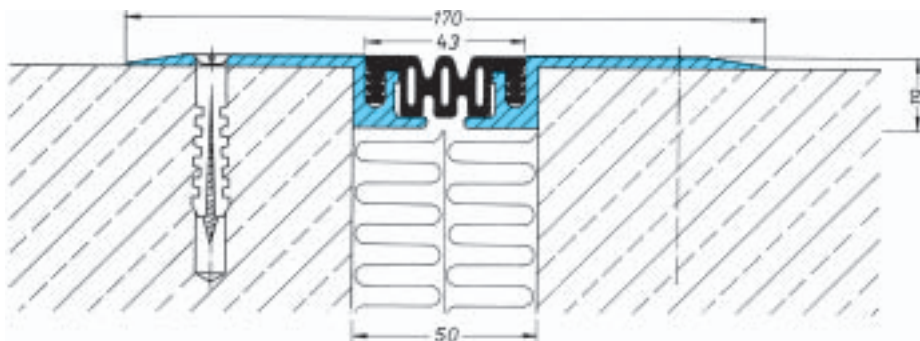

FN 50/20

Scale 1 : 2

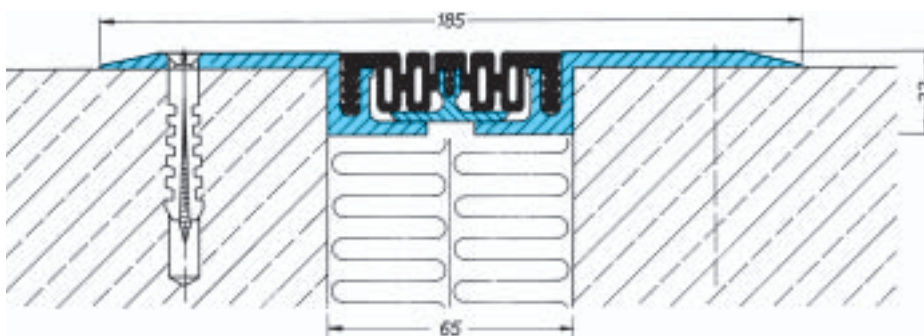

FN 65/20

Scale 1 : 2