


SERIES FP 135/...

FOR FLOORS WITH EXTREMELY WIDE JOINTS

EXPANSION JOINT SYSTEMS

- INSERT REPLACEABLE AT ANY TIME
- POSITIVE CONNECTION OF PRODUCTION LENGTHS BY STAGGERING THE JOINTS
- SOLID CONSTRUCTION
- MOVEMENT CAPACITY 34 MM
- FOR JOINT WIDTHS UP TO 120 MM

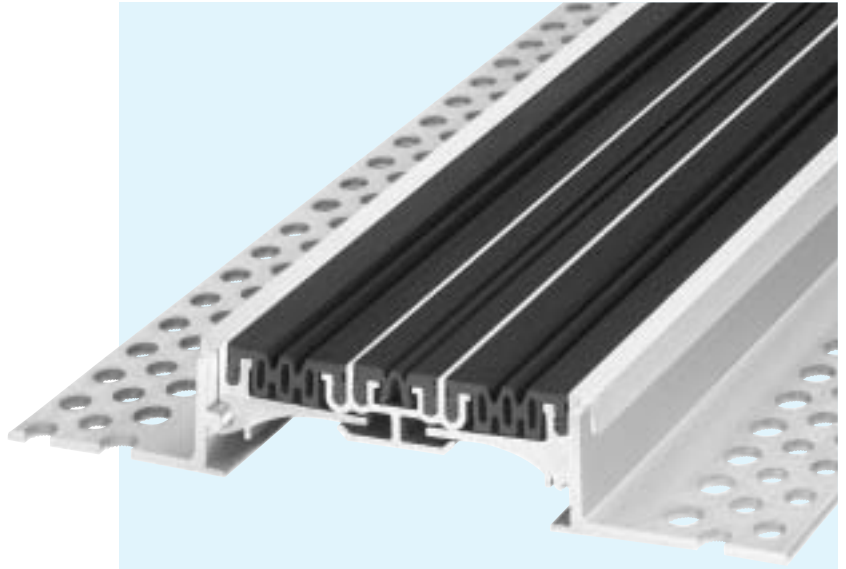

TECHNICAL DATA

Profile	Joint width max. mm	Total movement mm	Visible width of profile mm	Total width of profile mm	Installation height mm	*Load capacity lorries (DIN 1072) kN	*Load capacity fork lift trucks (DIN 1055) kN
FP 135/3000	120	34 +/-17	140	275	30	30	not allowed
FP 135/4000	120	34 +/-17	140	275	40	30	not allowed
FP 135/5000	120	34 +/-17	140	275	50	30	not allowed
FP 135/6500	120	34 +/-17	140	275	65	30	not allowed
FP 135/7500	120	34 +/-17	140	275	75	30	not allowed
FP 135/8500	120	34 +/-17	140	275	85	30	not allowed

Larger installation heights on request

*not designed for permanent use


MATERIAL

Aluminium side plates with perforated mounting brackets.
Flexible high quality elastomeric insert, long wearing, weather resistant, temperature resistant (-30°C to + 120°C), extensively resistant to oils, acids and bitumen.

Production length: 4 m, standard colours: black, grey
Corner versions: page 36–37
Installation instructions: page 39

Also available in special version **FPG 135/...** with smooth insert. Standard colour: grey, black. Total movement 16 mm +/-8 mm

For installation in asphalt, please ask for our technical advice.

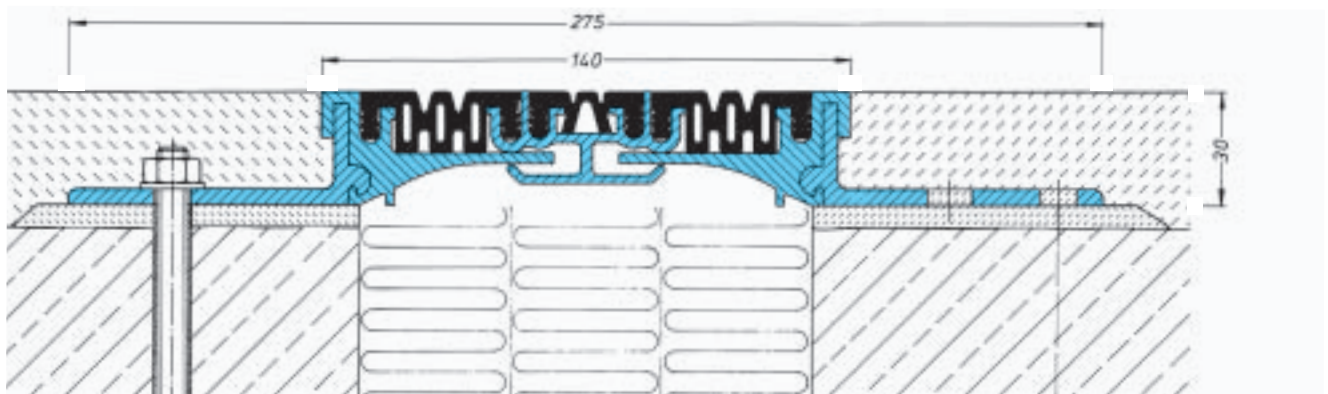

FP 135/3000

Scale 1 : 2