


Floor Profiles

FP 55 MS-4S / FP 55 NI-4S

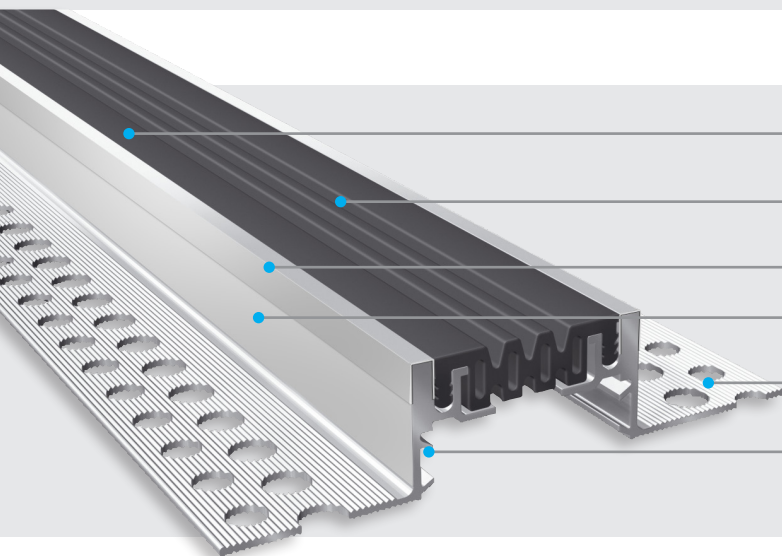

- Flexible high quality elastomeric insert**
Hard wearing, temperature resistant (-30°C to +120°C), replaceable
- Multi directional movement**
- Visible surface brass or stainless steel**
- High load capacity due to sturdy construction**
Solid aluminium brackets
- MultiHole mounting bracket**
for secure fixing
- Quick and easy installation**
Positive connection of production lengths by means of connection pieces

Profile	Joint width max. b_{f max} [mm]	Total Movement Δb_f [mm]	Visible width of profile b_s [mm]	Total width of profile b_t [mm]	Installation height h [mm]	Load capacity [kN]	Load capacity* [kN]	Load capacity [kN]
FP 55/21 MS / NI	50	16 (± 8)	57	150	21	30	300	-
FP 55/26 MS / NI	50	16 (± 8)	57	150	26	30	300	-
FP 55/36 MS / NI	50	16 (± 8)	57	150	36	30	300	-
FP 55/51 MS / NI	50	16 (± 8)	57	150	51	30	300	-
FP 55/76 MS / NI	50	16 (± 8)	57	150	76	30	300	-
FP 55/21 MS / NI-4S	58	22 (± 11)	65	158	21	30	300	-
FP 55/26 MS / NI-4S	58	22 (± 11)	65	158	26	30	300	-
FP 55/36 MS / NI-4S	58	22 (± 11)	65	158	36	30	300	-
FP 55/51 MS / NI-4S	58	22 (± 11)	65	158	51	30	300	-
FP 55/76 MS / NI-4S	58	22 (± 11)	65	158	76	30	300	-

*not designed for permanent use
Larger installation heights on request. For installation in asphalt, please ask for our technical advice.

Standard colours: black, grey
Production length: 4 m

