


SERIES FP 60/...

FOR HEAVY DUTY FLOORS

EXPANSION JOINT SYSTEMS

- INSERT REPLACEABLE AT ANY TIME
- POSITIVE CONNECTION OF PRODUCTION LENGTHS BY STAGGERING THE JOINTS
- SOLID CONSTRUCTION
- MOVEMENT CAPACITY 16 MM
- FOR JOINT WIDTHS UP TO 50 MM

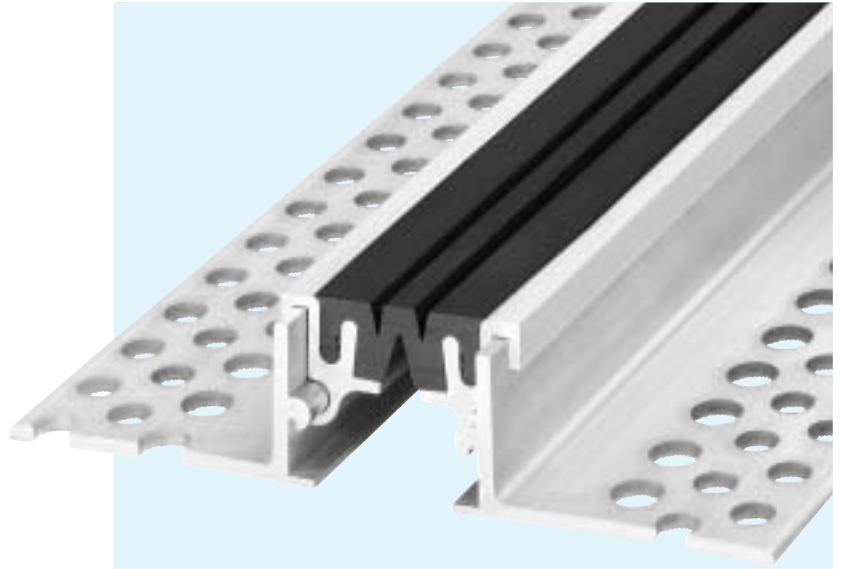

TECHNICAL DATA

Profile	Joint width max. mm	Total movement mm	Visible width of profile mm	Total width of profile mm	Installation height mm	Load capacity private cars kN	Load capacity lorries (DIN 1072) kN	Load capacity fork lift trucks (DIN 1055) kN
FP 60/3000	50	16 +10/-6	63	197	30	25	300	35
FP 60/4000	50	16 +10/-6	63	197	40	25	300	35
FP 60/5000	50	16 +10/-6	63	197	50	25	300	35
FP 60/6500	50	16 +10/-6	63	197	65	25	300	35
FP 60/7500	50	16 +10/-6	63	197	75	25	300	35
FP 60/8500	50	16 +10/-6	63	197	85	25	300	35

Larger installation heights on request

MATERIAL

Aluminium side plates with perforated aluminium mounting brackets.
Flexible high quality elastomeric insert, long wearing, weather resistant, temperature resistant (-30°C to + 120°C), extensively resistant to oils, acids and bitumen.

Production length: 4 m, standard colours: black, grey
Corner versions: page 36-37, installation instructions: page 39

Also available in special version **FPG 60/...** with smooth insert. Standard colour: grey. Total movement 8 mm +/-4 mm

For installation in asphalt, please ask for our technical advice.

