


SERIES FPI 145/... NI

WITH SHORT AAS-SEALING SHEETS FOR FLOORS WITH COATINGS

MIGUTAN

- PERFECT SEALING –
NO PERFORATION OF THE SEALING
ELEMENTS
- SEALING ON TOP OF SURFACE
- CENTRAL INSERT IS
INTERCHANGEABLE AT ANY TIME
- MOVEMENT CAPACITY 60 MM
- FOR JOINT WIDTHS UP TO 100 MM
- PROPER AND ECONOMICAL
FORMATION OF THE CONNECTION
JOINT BY USING AAP 60/20

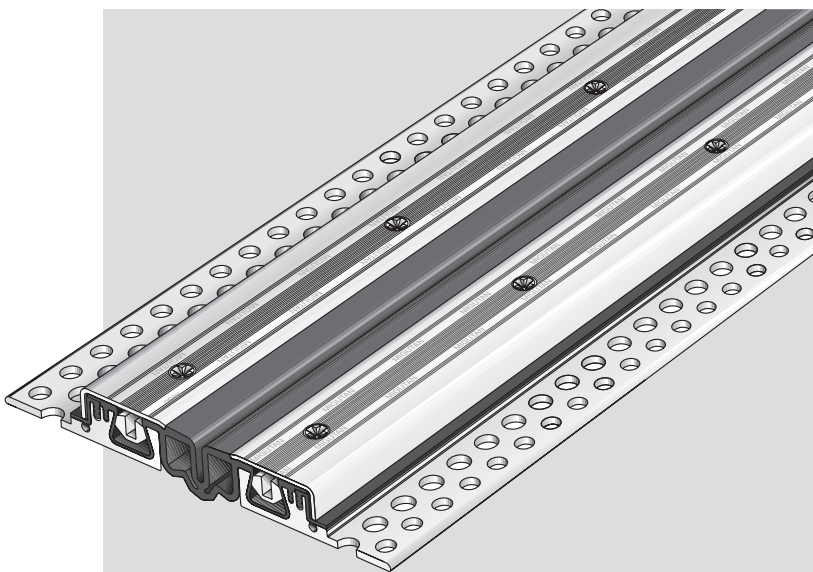

TECHNICAL DATA

Profile	Joint width max. mm	Total movement mm	Visible width of profile	Total width of profile	Installation height mm	Load capacity lorries (DIN 1072) kN	Load capacity fork lift trucks (DIN 1055) kN	Load capacity solid plastic tyres kg/mm width of wheel
FPI 145/28 NI	50*	60 ± 30	145	239	28	600	130	not allowed
FPI 145/40 NI	100	60 ± 30	145	239	40	600	130	not allowed
FPI 145/60 NI	100	60 ± 30	145	274	60	600	130	not allowed

* 100 mm max joint width if load by private cars only

Material description, important notes and special properties = Page 3


Larger heights = Page 13

Column-/Wall-connections = Page 12

Intersections = Page 14

Stainless Steel Cover Plates = Page 13

Installation instructions = Page 7

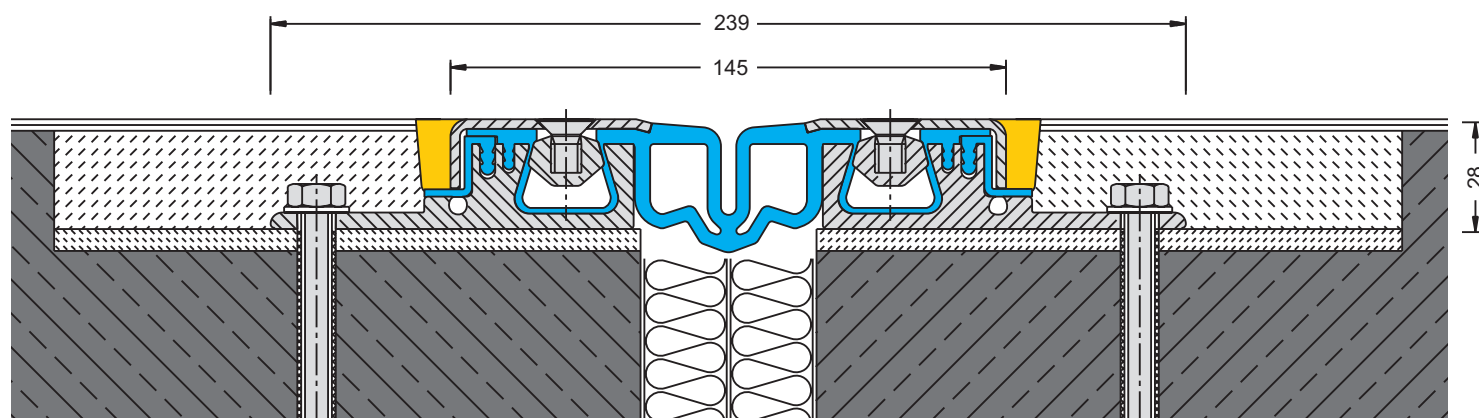

FPI 145/28 NI

Scale 1 : 2