


SERIES FPO 116/...

FOR FLOORS WITH LARGE MOVEMENTS

EXPANSION JOINT SYSTEMS

- INSERT REPLACEABLE AT ANY TIME
- POSITIVE CONNECTION OF PRODUCTION LENGTHS BY STAGGERING THE JOINTS
- PROFILE ABSORBS SETTLEMENTS
- MOVEMENT CAPACITY 30 MM
- FOR JOINT WIDTHS UP TO 105 MM

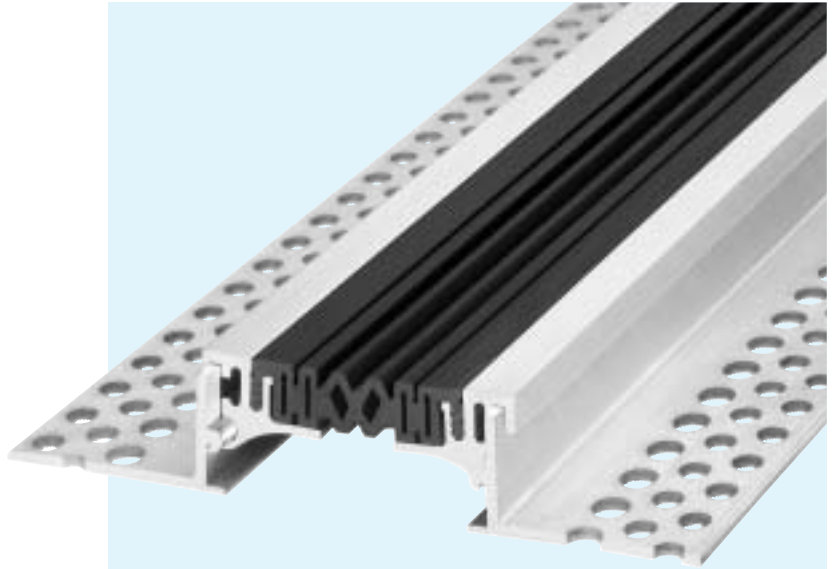

TECHNICAL DATA

Profile	Joint width max. mm	Total movement mm	Visible width of profile mm	Total width of profile mm	Installation height mm	Load capacity private cars kN	*Load capacity lorries (DIN 1072) kN	Load capacity fork lift trucks (DIN 1055) kN
FPO 116/2200	105	30 +/-15	116	249	22	30	300	not allowed
FPO 116/3000	105	30 +/-15	116	249	30	30	300	not allowed
FPO 116/4000	105	30 +/-15	116	249	40	30	300	not allowed
FPO 116/5000	105	30 +/-15	116	249	50	30	300	not allowed
FPO 116/6500	105	30 +/-15	116	249	65	30	300	not allowed
FPO 116/7500	105	30 +/-15	116	249	75	30	300	not allowed
FPO 116/8500	105	30 +/-15	116	249	85	30	300	not allowed

Larger installation heights on request


* not designed for permanent use

MATERIAL

Aluminium side plates with perforated mounting brackets.
Flexible high quality elastomeric insert, long wearing, weather resistant, temperature resistant (-30°C to + 120°C), extensively resistant to oils, acids and bitumen.

Production length: 4 m, standard colours: black, grey
Corner versions: page 36–37
Installation instructions: page 39

For installation in asphalt, please ask for our technical advice.

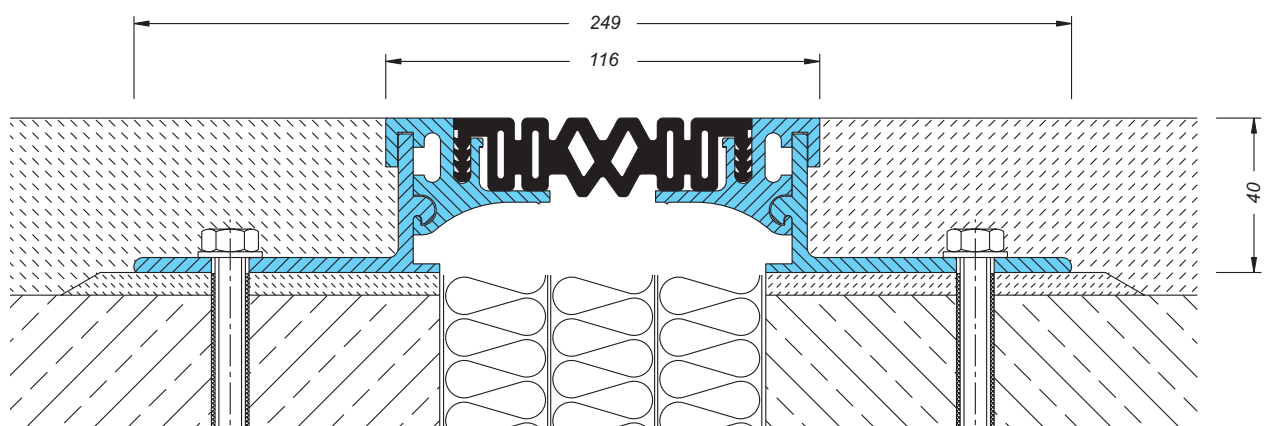

FPO 116/4000

Scale 1 : 2