


SERIES FS 146/...

FOR FLOORS WITH LARGE MOVEMENTS – ALL METAL PROFILE TO BE USED BY PRIVATE CARS AND PEDESTRIANS

EXPANSION JOINT SYSTEMS

- **VISIBLE SURFACE WITHOUT ANY GAPS TO AVOID DIRT ACCUMULATION**
- **SYMMETRICAL TOP VIEW**
- **SMOOTH TRANSITION – NO-BUMP**
- **PROFILE ABSORBS MOVEMENTS IN THREE DIRECTIONS**
- **GOOD SKID RESISTANCE GIVEN BY STRIATED SURFACE**
- **MOVEMENT CAPACITY 50 MM**
- **FOR JOINT WIDTHS UP TO 114 MM**

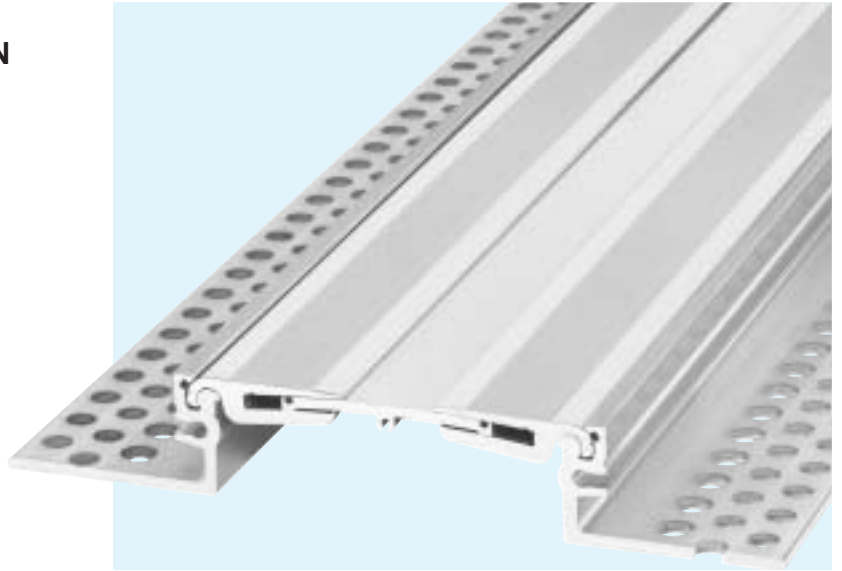

TECHNICAL DATA

Profile	Joint width max. mm	Total movement mm	Visible width of profile mm	Total width of profile mm	Installation height mm	Load capacity private cars kN
FS 146/2200	114	50 +/-25	146	262	22	12
FS 146/3000	114	50 +/-25	146	262	30	12
FS 146/4200	114	50 +/-25	146	266	42	12
FS 146/5200	114	50 +/-25	146	266	52	12
FS 146/6200	114	50 +/-25	146	266	62	12
FS 146/7700	114	50 +/-25	146	268	77	12
FS 146/8700	114	50 +/-25	146	268	87	12
FS 146/9700	114	50 +/-25	146	268	97	12

Larger installation heights on request


MATERIAL

Aluminium cover profiles with striated top surface and perforated mounting brackets.

Production length: 4 m
Colour: aluminium

Installation instructions: page 39

Corner Versions E3 and E4 available (please see page 27).

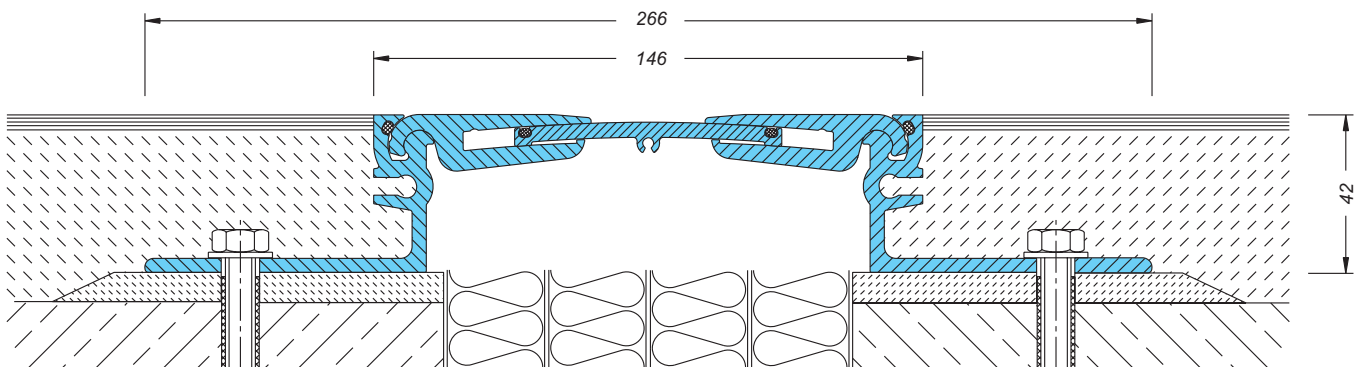

FS 146/4200

Scale 1 : 2