


SERIES D 12/..., D 15/... and D 20/...

FOR WALLS AND CEILINGS WITH PLASTER AND TILES

EXPANSION JOINT SYSTEMS

- **GOOD FIXING AND ADHERENCE UNDER PLASTER**
BY PERFORATED MOUNTING BRACKETS
- **DOUBLE PROTECTION AGAINST WATER**
DUE TO DOUBLE SLIDING OF THE SEALING INSERT WITHIN THE METAL PROFILES
- **PROFILE ABSORBS LARGE MOVEMENTS**
WITH FOLD INSERT
- **PROFILE ABSORBS SETTLEMENTS**
BY SLIDING OF INSERT WITHIN THE METAL PROFILE

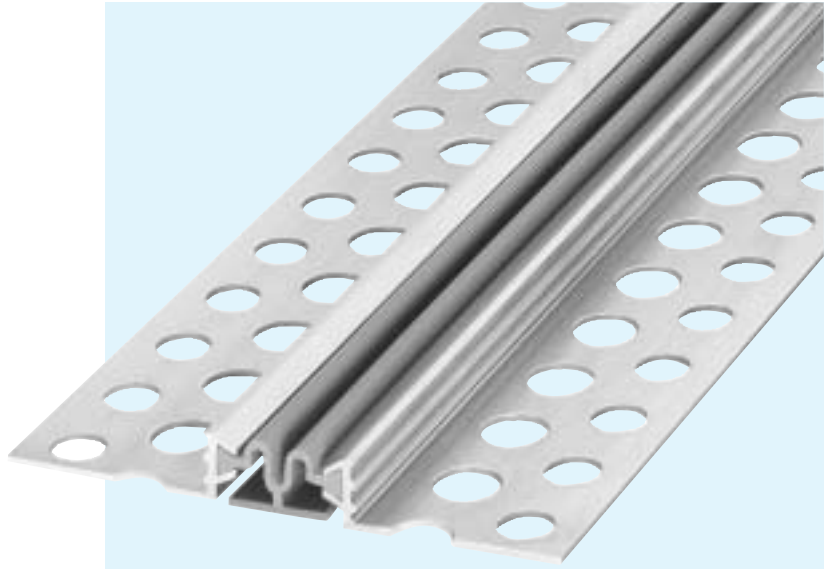

TECHNICAL DATA

MATERIAL

Aluminium side plates with perforated mounting brackets
Flexible high quality elastomeric insert for interior and exterior use (weather resistant)

Production length: 4 m


Standard colour: grey

Profile types D 12/300, D 15/300, DE 12/400 and DE 15/400 can also be supplied with a beige insert

If longer lengths than 4 m are required, exact details of total joint lengths must be stated
The fold insert is then supplied in one piece up to approx. 20 m for the complete joint

Fold insert: up to 50 m length

Installation instructions: page 45

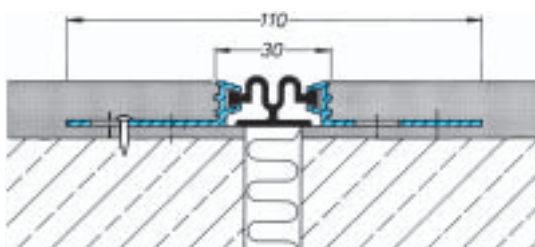

D 12/300

Scale 1 : 2



Insert of profile
D 12/500 and DE 12/600
D 15/500 and DE 15/600
D 20/500 and DE 20/600

Insert of profile
D 12/700 and DE 12/800
D 15/700 and DE 15/800
D 20/700 and DE 20/800

Insert of profile
D 12/900 and DE 12/1100
D 15/900 and DE 15/1100
D 20/900 and DE 20/1100

Insert of profile
D 12/1300 and DE 12/1500
D 15/1300 and DE 15/1500
D 20/1300 and DE 20/1500