


# SERIES FA 12/...

FOR COVERING JOINTS IN WALLS, CEILINGS AND FACADES – SURFACE FIXING



## EXPANSION JOINT SYSTEMS

- **PROFILE ABSORBS LARGE MOVEMENTS**  
WITH FOLD INSERT
- **PROFILE ABSORBS SETTLEMENTS**  
BY SLIDING OF INSERT WITHIN THE METAL PROFILE
- **CELLULAR RUBBER SEALING STRIPS**  
TO COMPENSATE FOR UNEVENNESS IN THE BUILDING SURFACE
- **CAN ALSO BE USED AS CORNER VERSION**  
SEE DRAWINGS

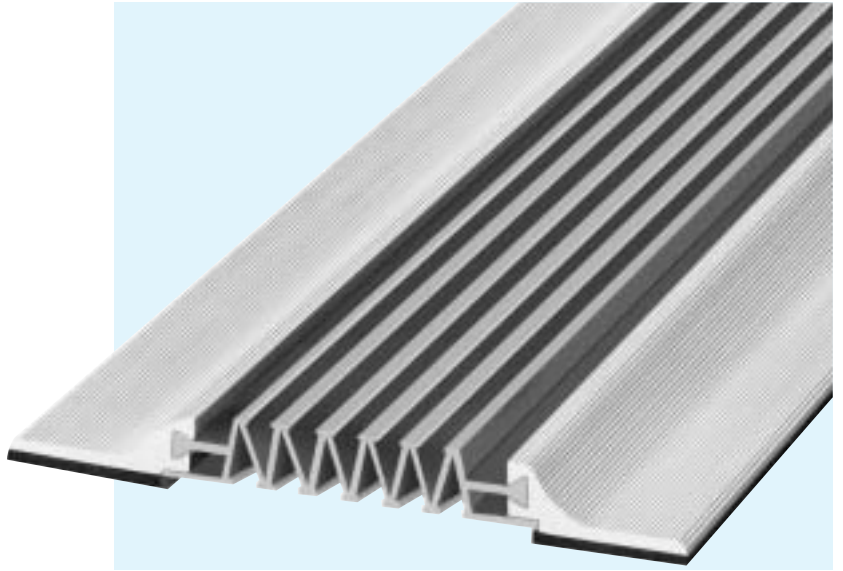

## TECHNICAL DATA

Profile	Joint width max. mm	Total movement mm	Total width of profile mm	Profile height mm
FA 12/ 500	65	40 +/-20	125	12
FA 12/ 700	90	50 +/-25	150	12
FA 12/ 900	135	100 +/-50	195	12
FA 12/1300	200	120 +/-60	260	12

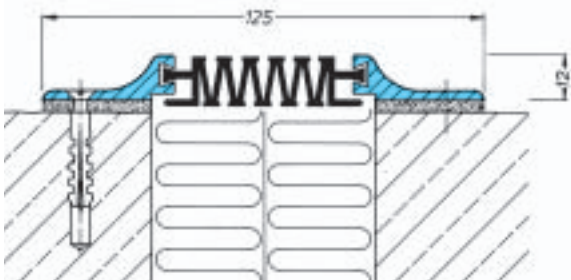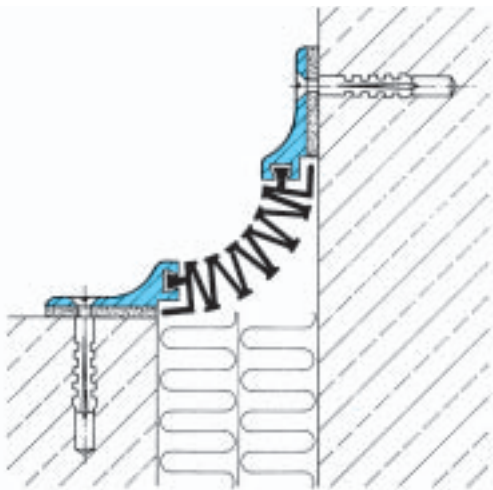

FA 12/500

Scale 1 : 2

### MATERIAL

Aluminium side plates with flexible high quality elastomeric insert for interior and exterior use (weather resistant)

Aluminium side plates with cellular rubber sealing strips

Production length: 4 m

Standard colour: grey

Fold insert: up to 50 m length

Installation instructions: page 45

**If longer lengths than 4 m are required, exact details of total joint lengths must be stated.**

**The fold insert is then supplied in one piece up to approx. 20 m for the complete joint.**



Insert of profile FA 12/500

Insert of profile FA 12/700

Insert of profile FA 12/900

Insert of profile FA 12/1300