


SERIES FPI 145/90 B NI

FOR FLUSH INSTALLATION IN CONCRETE DECKS

MIGUTAN

- **PERFECT SEALING –
NO PERFORATION OF THE SEALING
ELEMENTS**
- **SEALING ON TOP OF SURFACE**
- **CENTRAL INSERT IS
INTERCHANGEABLE AT ANY TIME**
- **MOVEMENT CAPACITY
UP TO 60 MM**
- **PROPER AND ECONOMICAL
FORMATION OF THE CONNECTION
JOINT BY USING AAP 60/20**

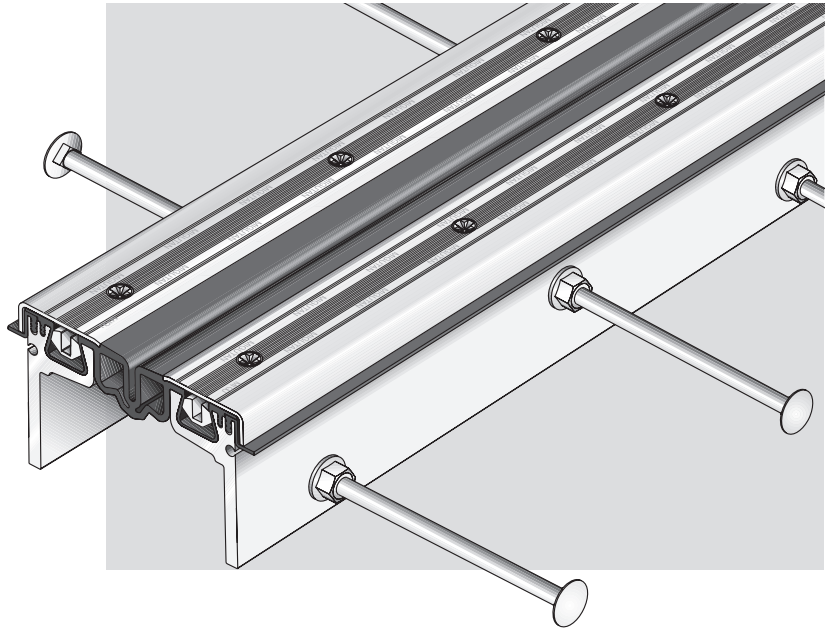

TECHNICAL DATA

Profile	Joint width max. mm	Total movement mm	Visible width of profile	Installation height mm	Load capacity lorries (DIN 1072) kN	Load capacity fork lift trucks (DIN 1055) kN	Load capacity solid plastic tyres kg/mm width of wheel
FPI 145/90 B NI with anchor rods	118	60 ± 30	145	91	300	70	not allowed


Material description, important notes and special properties = Page 3

Column-/Wall-connections = Page 11+12

Intersections = Page 14

Stainless Steel Cover Plates = Page 13

Usage of AAP 60/20 = Page 9

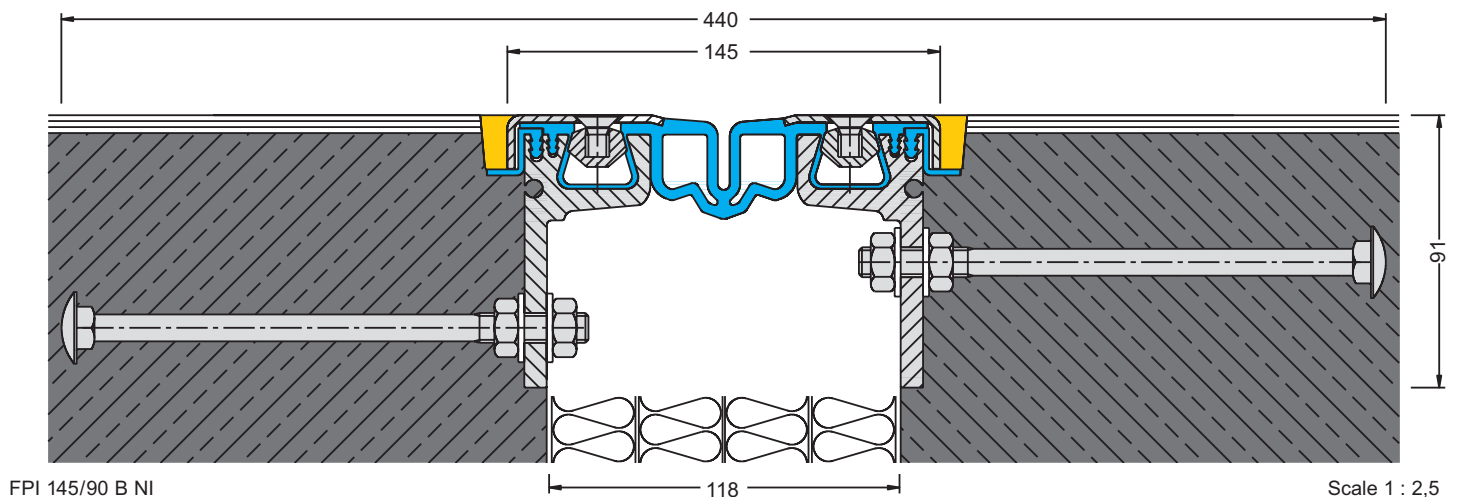

FPI 145/90 B NI

Scale 1 : 2,5