


SERIES FS 135/...

FOR FLOORS WITH EXTRA HIGH LOAD CAPACITY

MIGUTRANS

- **VISIBLE SURFACE SHOWS NO GAPS (TO AVOID DIRT ACCUMULATION)**
- **SOLID ALL METAL-PROFILE (HARD WEARING, MAINTENANCE-FREE, LONG LASTING)**
- **PROFILE ABSORBS MOVEMENT IN THREE DIRECTIONS**
- **EXTREMELY HIGH LOAD CAPACITY**
- **INSTALLATION HEIGHT ONLY 25 MM**

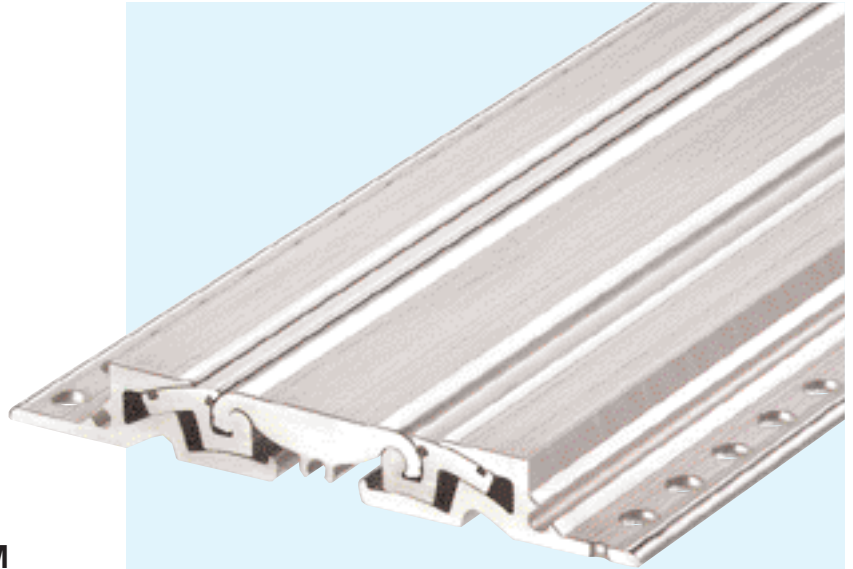

TECHNICAL DATA


Profile	Joint width max. mm	Total Movement mm	Visible Width of Profile mm	Total Width of Profile mm	Installation Height mm	Load capacity Lorries (DIN 1072) MP	Load capacity Fork lift trucks (DIN 1055) MP	Load capacity Solid plastic tyres kg/mm width of wheel
FS 135/2500	35	20 ± 10	135	206	25	60	25	30

Material description, important notes and special properties = Page 2

Intersections = Page 26

Additional examples for application = Page 22–24

Installation instruction = Page 32

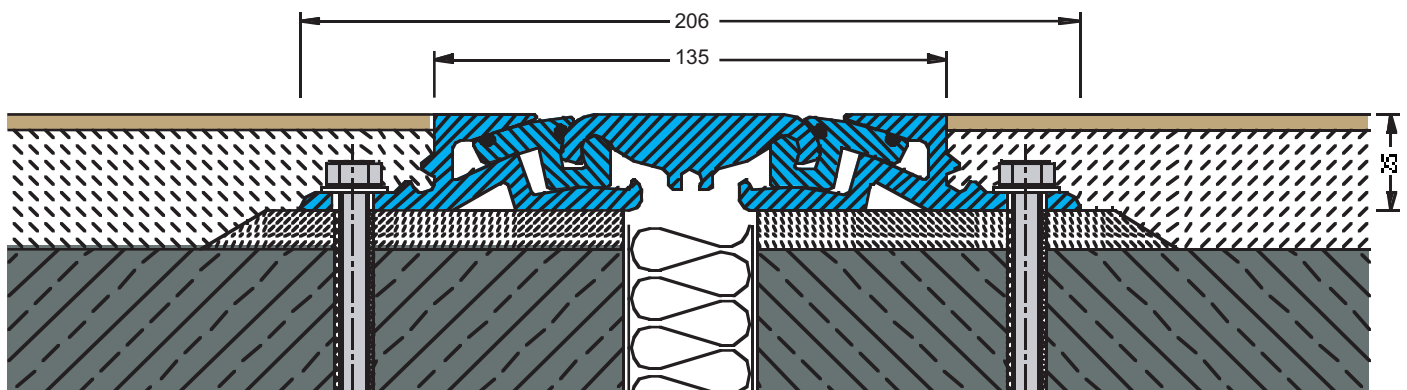

FS 135/2500

Scale 1 : 2