

SERIES FS 155/...

FOR HEAVY DUTY FLOORS

MIGUTRANS

- **VISIBLE SURFACE SHOWS NO GAPS (TO AVOID DIRT ACCUMULATION)**
- **SOLID ALL METAL PROFILE (HARD WEARING, MAINTENANCE-FREE, LONG LASTING)**
- **PROFILE ABSORBS MOVEMENTS IN THREE DIRECTIONS**
- **MOVEMENT CAPACITY 40 MM**
- **FOR JOINT WIDTHS UP TO 120 MM**



TECHNICAL DATA

Profile	Joint width max. mm	Total Movement mm	Visible Width of Profile mm	Total Width of Profile mm	Installation Height mm	Load capacity Lorries (DIN 1072) MP	Load capacity Fork lift trucks (DIN 1055) MP	Load capacity Solid plastic tyres kg/mm width of wheel
FS 155/3000	120	40 ± 20	157	273	30	60	13	15
FS 155/4200	120	40 ± 20	157	273	42	60	13	15
FS 155/5200	120	40 ± 20	157	273	52	60	13	15
FS 155/6200	120	40 ± 20	157	273	62	60	13	15
FS 155/7700	120	40 ± 20	157	273	77	60	13	15
FS 155/8700	120	40 ± 20	157	273	87	60	13	15
FS 155/9700	120	40 ± 20	157	273	97	60	13	15

Material description, important notes and special properties = Page 2


Larger installation heights = Page 23

Corner - versions = Page 16+19

Intersections = Page 26

Additional examples for application = Page 21–24

Installation instruction = Page 32

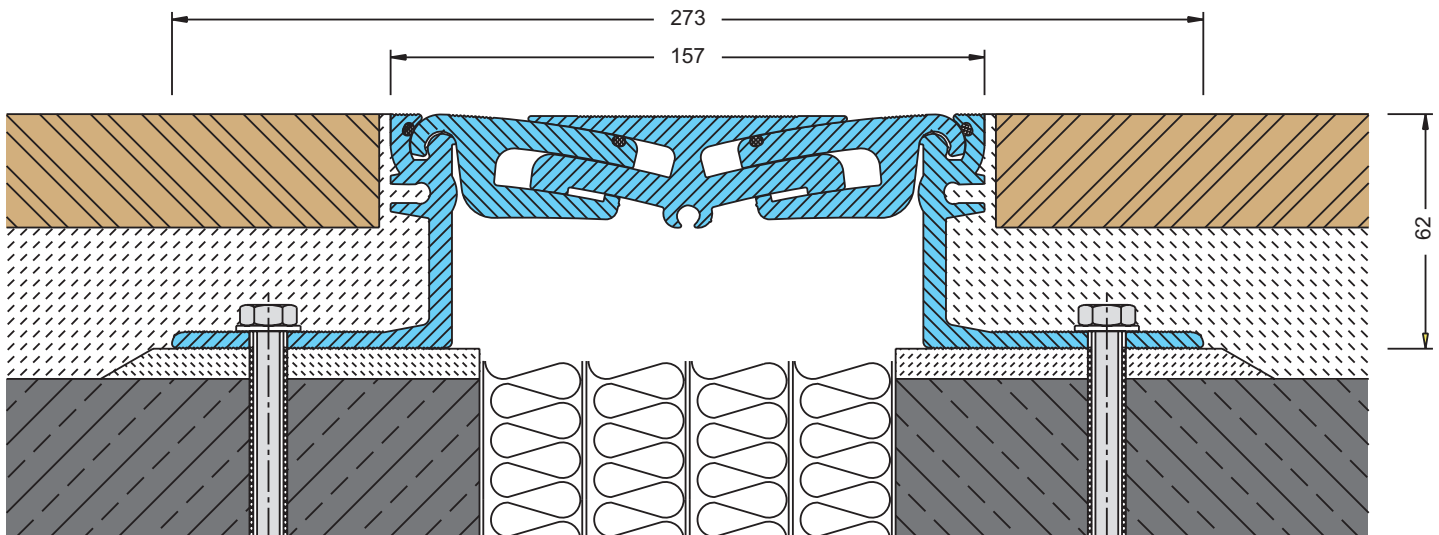

FS 155/6200

Scale 1 : 2