


SERIES FS 185/...

FOR HEAVY DUTY FLOORS – TO BE USED BY FORK LIFT AND PALLET TRUCKS

MIGUTRANS

- **VISIBLE SURFACE SHOWS NO GAPS (TO AVOID DIRT ACCUMULATION)**
- **SOLID ALL METAL-PROFILE (HARD WEARING, MAINTENANCE-FREE, LONG LASTING)**
- **PROFILE ABSORBS MOVEMENT IN THREE DIRECTIONS**
- **MOVEMENT CAPACITY 60 MM**
- **FOR JOINT WIDTHS UP TO 140 MM**

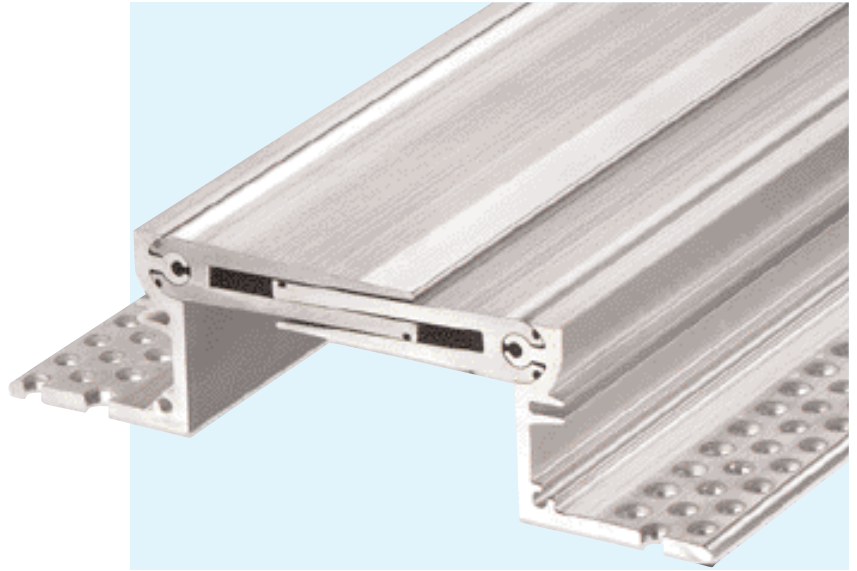

TECHNICAL DATA

Profile	Joint width max. mm	Total Movement mm	Visible Width of Profile mm	Total Width of Profile mm	Installation Height mm	Load capacity Lorries (DIN 1072) MP	Load capacity Fork lift trucks (DIN 1055) MP	Load capacity Solid plastic tyres kg/mm width of wheel
FS 185/4000	140	60 ± 30	185	305	40	30	7	6,5
FS 185/8000	140	60 ± 30	185	305	80	30	7	6,5


Material description, important notes and special properties = Page 2

Corner - versions = Page 17+19

Intersections = Page 26

Additional examples for application = Page 21–24

Installation instruction = Page 32

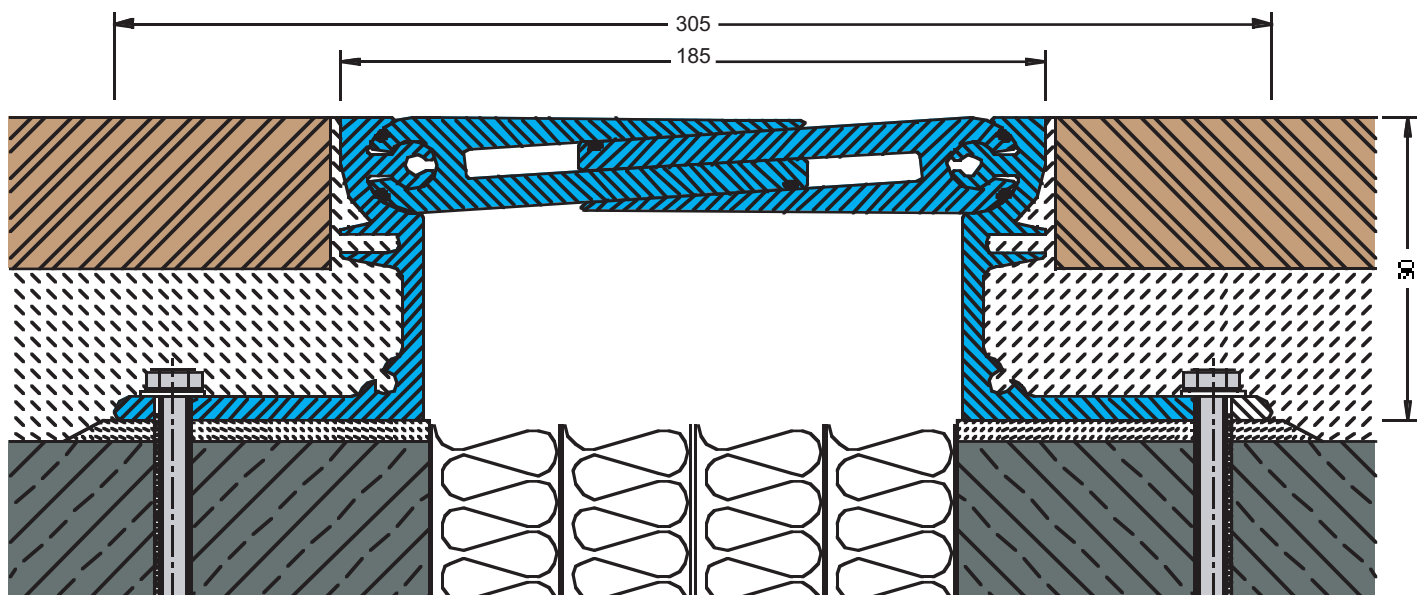

FS 185/8000

Scale 1 : 2