


SERIES FS 40/...

FOR HEAVY DUTY FLOORS – TO BE USED BY FORK LIFT AND PALLET TRUCKS

MIGUTRANS

- **SOLID ALL METAL-PROFILE
(HARD WEARING, MAINTENANCE-FREE, LONG LASTING)**
- **SMALL VISIBLE SURFACE**
- **LARGE MOVEMENT CAPACITY
UP TO 16 MM**
- **INSTALLATION HEIGHT
FROM 19 MM UPWARDS**

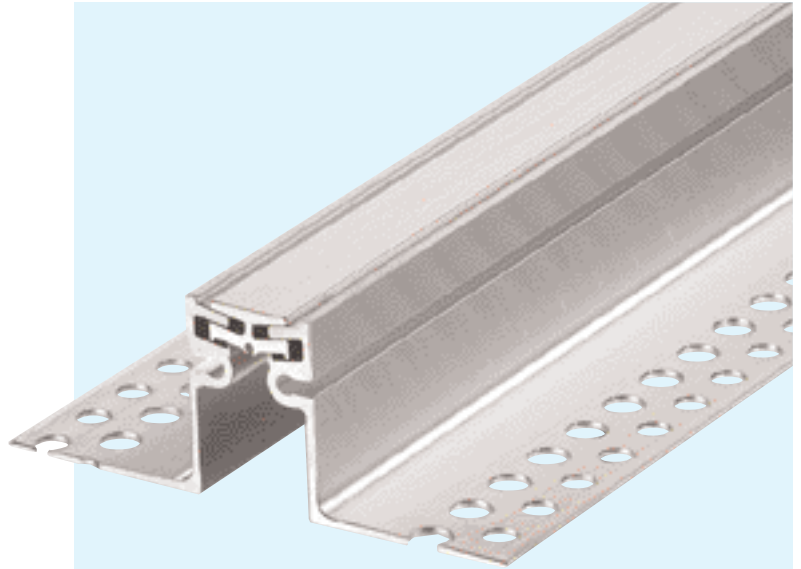

TECHNICAL DATA


Profile	Joint width max. mm	Total Movement mm	Visible Width of Profile mm	Total Width of Profile mm	Installation Height mm	Load capacity Lorries (DIN 1072) MP	Load capacity Fork lift trucks (DIN 1055) MP	Load capacity Solid plastic tyres kg/mm width of wheel
FS 40/1900	35	16 ± 8	40	173	19	30	7	6,5
FS 40/3500	35	16 ± 8	40	163	35	30	7	6,5
FS 40/6000	35	16 ± 8	40	163	60	30	7	6,5

Material description, important notes and special properties = Page 2

Intersections = Page 26

Additional examples for application = Page 21–24

Installation instruction = Page 32

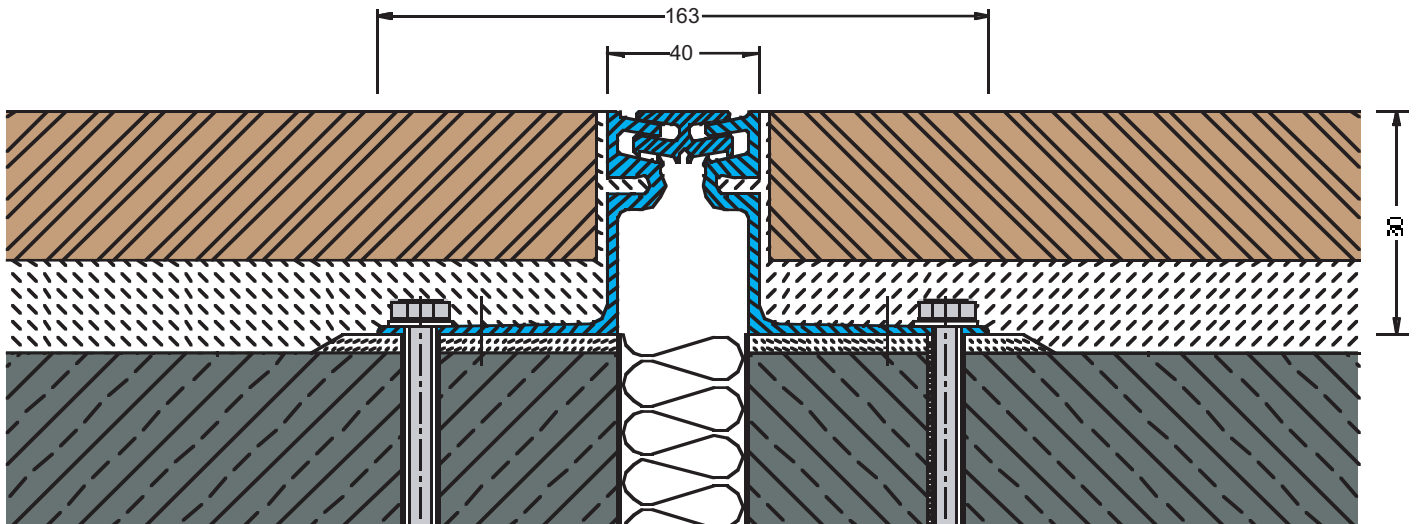

FS 40/6000

Scale 1 : 2