


# SERIES FS 50/...

FOR FLOORS – TO BE USED BY LIGHT FORK LIFT AND PALLET TRUCKS

## MIGUTRANS

- **VISIBLE SURFACE SHOWS NO GAPS (TO AVOID DIRT ACCUMULATION)**
- **SOLID ALL METAL-PROFILE (HARD WEARING, MAINTENANCE-FREE, LONG LASTING)**
- **PROFILE ABSORBS MOVEMENT IN THREE DIRECTIONS**
- **INSTALLATION HEIGHT FROM 20 MM UPWARDS**

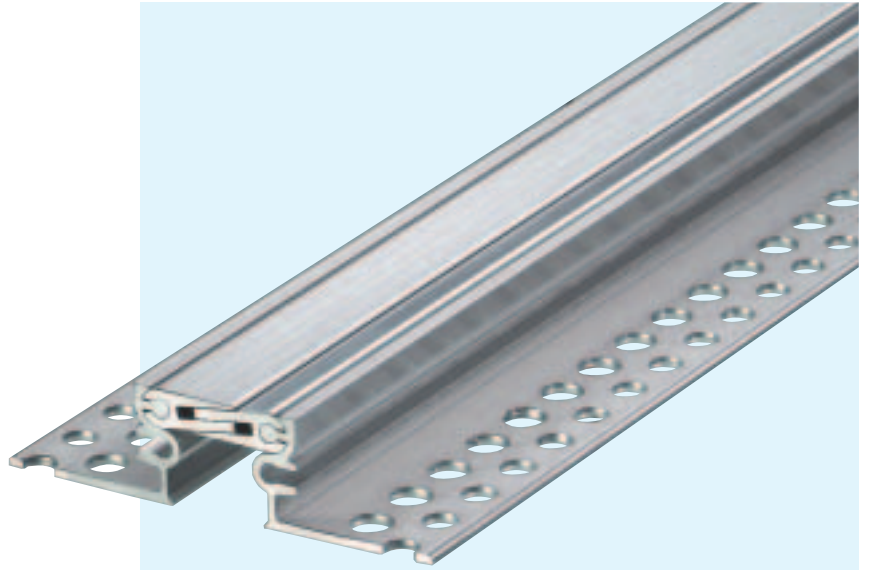

### TECHNICAL DATA

Profile	Joint width max. mm	Total Movement mm	Visible Width of Profile mm	Total Width of Profile mm	Installation Height mm	Load capacity Lorries (DIN 1072) MP	Load capacity Fork lift trucks (DIN 1055) MP	Load capacity Solid plastic tyres kg/mm width of wheel
FS 50/2000	30	10 ± 5	53	140	20	9	3,5	3
FS 50/3500	30	10 ± 5	53	140	35	9	3,5	3
FS 50/5000	30	10 ± 5	53	140	50	9	3,5	3


Material description, important notes and special properties = Page 2

Corner-version E4 = Page 15

Intersections = Page 26

Additional examples for application = Page 21–24

Installation instruction = Page 32

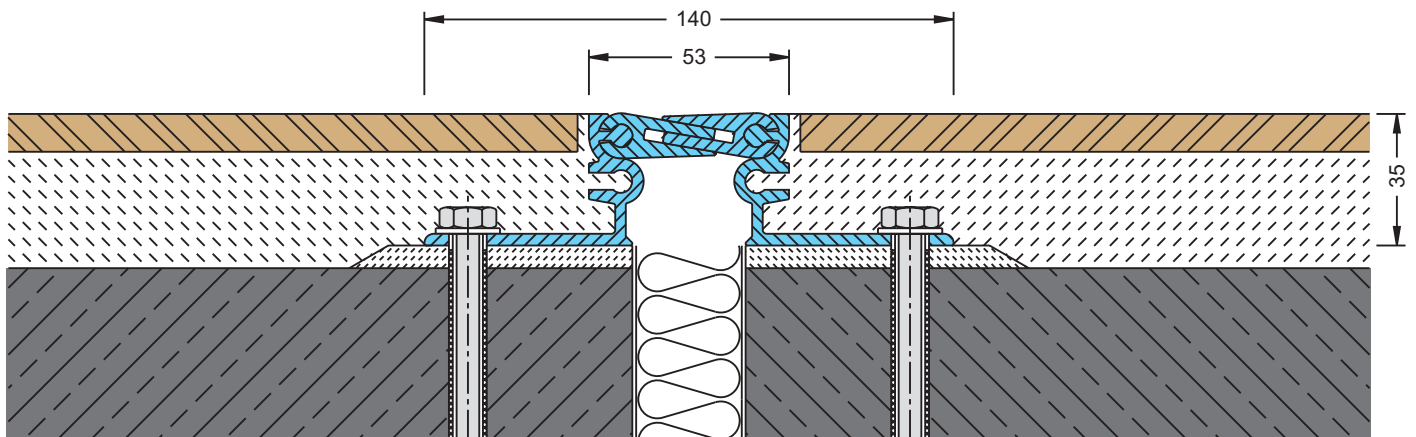

FS 50/3500

Scale 1 : 2