





## LUX ELEMENTS®-TOP

### The whirlpool surrounds

We produce whirlpool cladding in the “ledge” and “footboard/ledge” designs for the free-standing, niche, corner and 3-sided fitting arrangements, as standard or customised. The opening for the air supply can be manufactured according to customer specification. There are two methods for fitting the maintenance openings for carrying out maintenance and repair work.

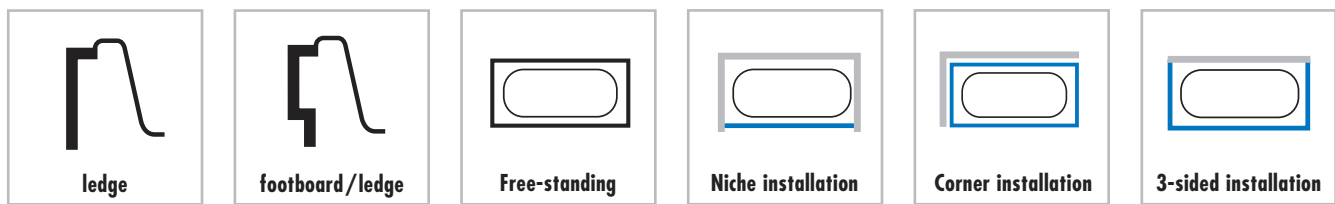

### The methods of maintenance openings

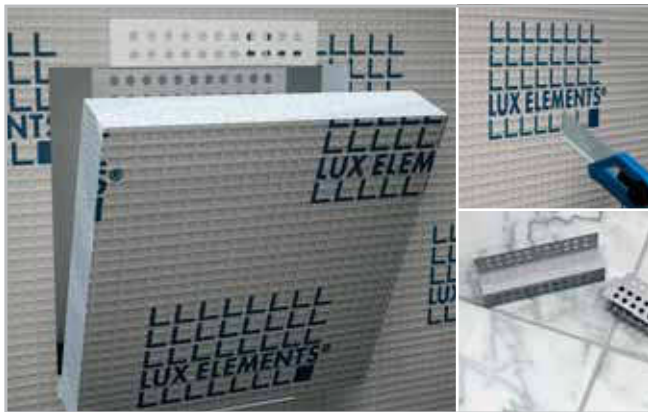

MONT-TOPREV

#### Method: MONT-TOPREV

This is the simple, quick and flexible method for all TOP designs. After the bath cladding has been fitted, the gap for the maintenance opening is cut at the relevant place, to the appropriate size according to the joint pattern of the tiles. MONT-TOPREV holding profiles should be placed at the top and bottom and the sawn out part should be pressed into the opening against the holding profiles. The tiling should be completed and the joint around the cut out area should be sealed elastically using silicone. If the maintenance opening is used, the silicone should be cut off.



TOP-REVR

#### Method: TOP-REVR

The technique for whirlpool cladding for the design modules ledge and footboard/ledge and all customised tubs. Individual maintenance opening made to measure according to customer requirements and fitted on the front and/or on the side. Niche installation allows for complete freedom in design and flexibility in regard to the size of the tiles. The maintenance opening can be opened and closed quickly and easily due to magnetic clasps.