


SERIES FP 70/... MS WITH CAPPINGS MADE OF BRASS SERIES FP 70/... NI WITH CAPPINGS MADE OF STAINLESS STEEL

EXPANSION JOINT SYSTEMS

- INSERT REPLACEABLE AT ANY TIME
- POSITIVE CONNECTION OF PRODUCTION LENGTHS BY STAGGERING THE JOINTS
- PERFORATED MOUNTING BRACKETS
- MOVEMENT CAPACITY 25 MM
- FOR JOINT WIDTHS UP TO 70 MM

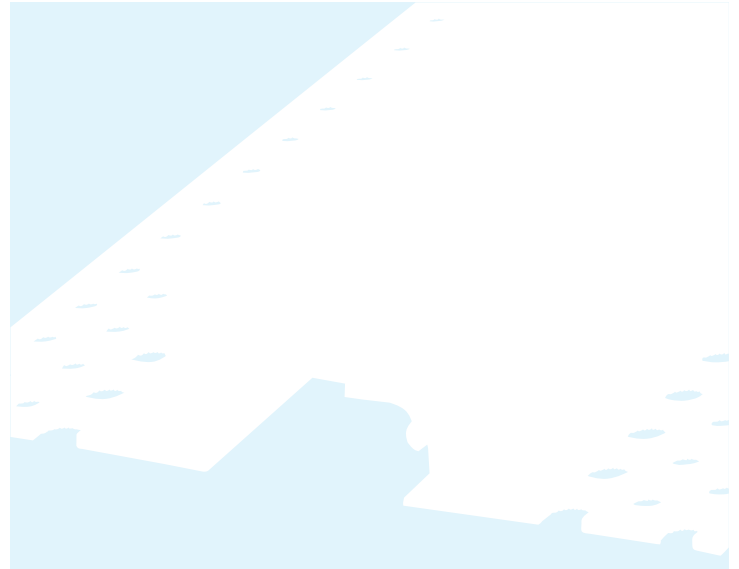

TECHNICAL DATA

Profile	Joint width max. mm	Total movement mm	Visible width of profile mm	Total width of profile mm	Installation height mm	Load capacity private cars kN	*Load capacity lorries (DIN 1072) kN	Load capacity fork lift trucks (DIN 1055) kN
FP 70/2200 MS or NI	70	25 +16/-9	78	210	22	30	300	not allowed
FP 70/3000 MS or NI	70	25 +16/-9	78	210	31	30	300	not allowed
FP 70/4000 MS or NI	70	25 +16/-9	78	210	41	30	300	not allowed
FP 70/5000 MS or NI	70	25 +16/-9	78	210	51	30	300	not allowed
FP 70/6500 MS or NI	70	25 +16/-9	78	210	66	30	300	not allowed
FP 70/7500 MS or NI	70	25 +16/-9	78	210	76	30	300	not allowed
FP 70/8500 MS or NI	70	25 +16/-9	78	210	86	30	300	not allowed

Larger installation heights on request


*not designed for permanent use

MATERIAL

Aluminium side plates with perforated mounting brackets. The parts remaining visible after installation have a rolled-on U-profile made of stainless steel (NI) or brass (MS). Flexible high quality elastomeric insert, long wearing, weather resistant, temperature resistant (-30°C to + 120°C), extensively resistant to oils, acids and bitumen.

Production length: 4 m, standard colours: black
Corner versions: page 36–37, installation instructions: page 39

For installation in asphalt, please ask for our technical advice.

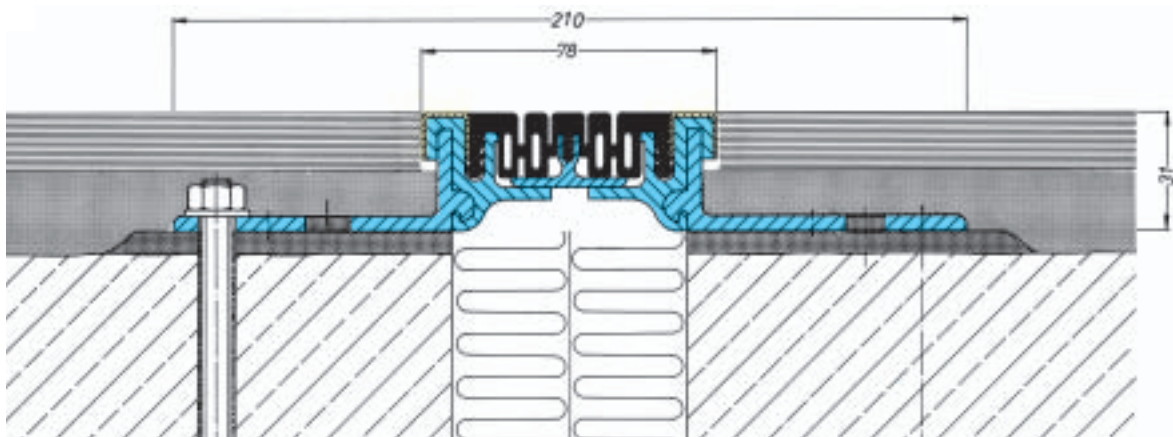

FP 70/3000 MS

Scale 1 : 2