


transition profile for matching floors

folocover™ EP

FOLOCOVER EP is a profile joining two adjacent surfaces of different floor covering material (cement/ceramic or wood/ceramic or with other resin or vinyl flooring combinations) allowing an invisible movement zone, therefore performs also as a movement joint as well as a decorative finishing trim. It also covers slight imperfections of junctions and cuts for floor separation.

Vertical dovetail anchorage.

Illustrated scale dimension 1:1

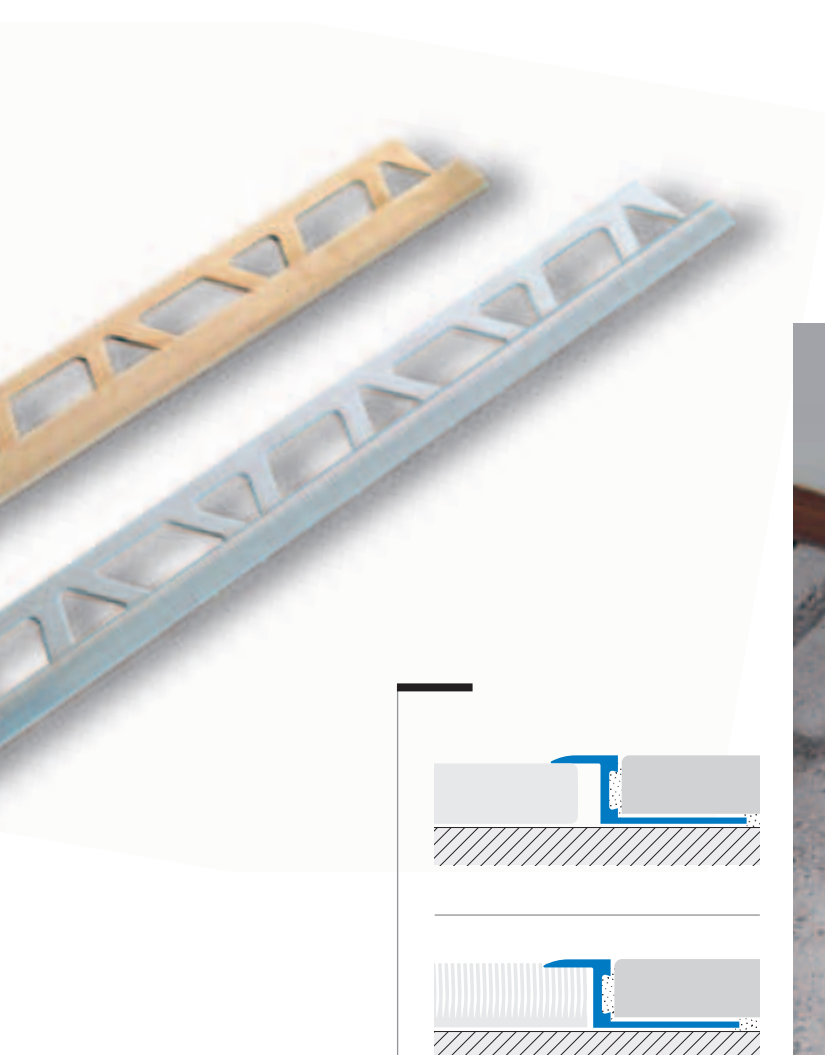

FOLOCOVER EP-ON Natural Brass

This brass profile is developed with prime choice raw material in order to guarantee tolerance and endurance to chemical and mechanical solicitations. It is primarily applied on both indoor and outdoor floors and can bear intense transit areas as well as for detailing elegant residential coverings. Through contact with moisture or corrosive media, brass may oxidize on exposed surfaces. This situation can be easily solved by buffing the product with a conventional polisher to return to its original shine.

Material: Extruded Natural brass
Lenght: 2,70 metres
Anchorage improved on vertical side

H=mm	Art.
8	EP 80 ON
10	EP 100 ON
12,5	EP 125 ON

FOLOCOVER EP-IL Stainless Steel AISI 304 - DIN 1.4301

This stainless steel profile is AISI 304 standard which ensures high tolerance to most of diluted chemicals found in laboratories or strong detergents present in food processing plants, commercial kitchens, slaughter houses, breweries, hospitals, public toilets etc. The profile has a slight difference in shape compared to the brass one, due to the steel bending process.

Material: Stainless steel AISI 304
Lenght: 2,70 metres

H=mm	Art.
8	EP 80 IL
10	EP 100 IL
12,5	EP 125 IL