



separation joint profile for grinding/polishing

FOLOJOINT PT profile is a separation joint for several floors available in different sizes. The face width at surface is 2,5 mm. It is quite flexible and adaptable to decorative contour design laying, whether it be marble or palladiana terrazzo floors laid on cement or resin based screeds. This article can bear grinding/polishing treatment during the laying process.

Illustrated scale dimension 1:1



folojoint™ PT

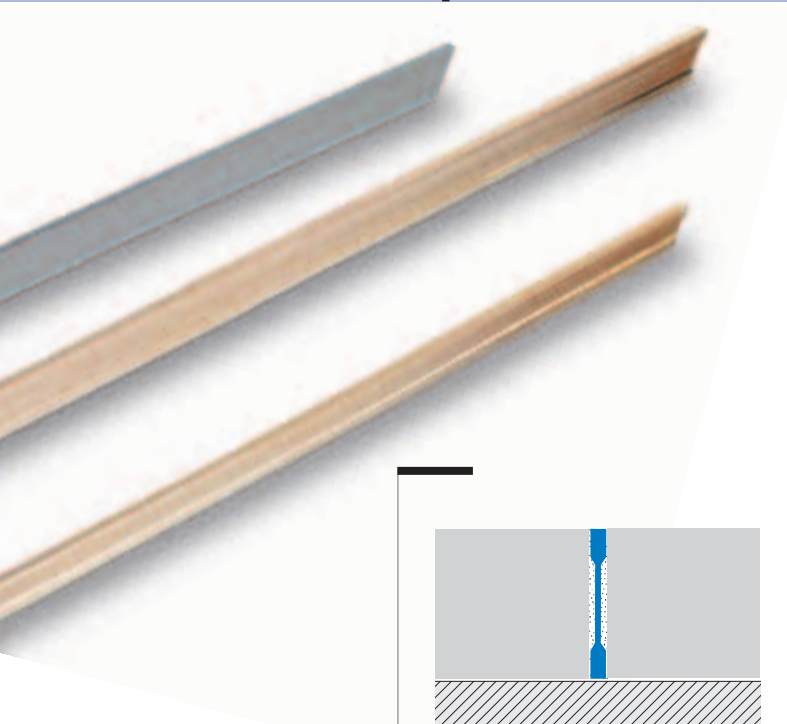

FOLOJOINT PT-ON Natural Brass

This brass profile is developed with prime choice raw material in order to guarantee tolerance and endurance to chemical and mechanical solicitations. It is primarily applied on both indoor and outdoor floors and can bear intense transit areas as well as for detailing elegant residential coverings. Through contact with moisture or corrosive media, brass may oxidize on exposed surfaces. This situation can be easily solved by buffing the product with a conventional polisher to return to its original shine.

Material: Extruded Natural brass
Lenght: 2,70 metres
Anchorage improved on vertical side

HxB	Art.
10x2,5	PT 100 ON
15x2,5	PT 150 ON
20x2,5	PT 200 ON
40x2,5	PT 400 ON
30x5,0	PT 305 ON

FOLOJOINT PT-IN Natural Stainless Steel AISI 304 - DIN 1.4301

This stainless steel profile is AISI 304 standard which ensures high tolerance to most of diluted chemicals found in laboratories or strong detergents present in food processing plants, commercial kitchens, slaughter houses, breweries, hospitals, public toilets etc. The profile has a slight difference in shape compared to the brass one, due to the steel bending process.

Material: Stainless Steel AISI 304
Lenght: 2,70 metres

HxB	Art.
10x2,5	PT 100 IN
15x2,5	PT 150 IN
20x2,5	PT 200 IN
40x2,5	PT 400 IN