



# joining profile for floors at different heights

## fololevel™ RP

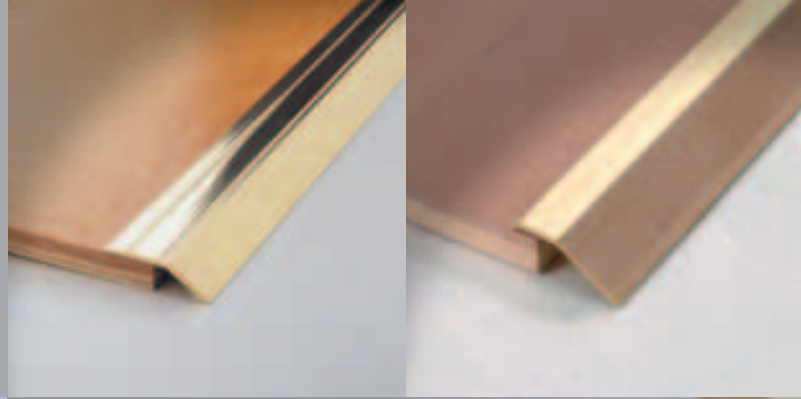

**FOLOLEVEL RP** is conceived as terminal and joining profile for floors at different heights. This product can also cover slight imperfections due to cuts or chipping of different materials such as wood floors joining to linoleum or carpeting.

**FOLOLEVEL RP** series comprises different height adjustments ranging from a 4,5 ÷ 12,5 mm scale and a 3 ÷ 14 mm mismatch. The product is usually sold with a ready to fix high quality self-adhesive for DIY installation. Available also in the pre-drilled version, to be fixed with screws and dowels. Illustrated scale dimension 1:1

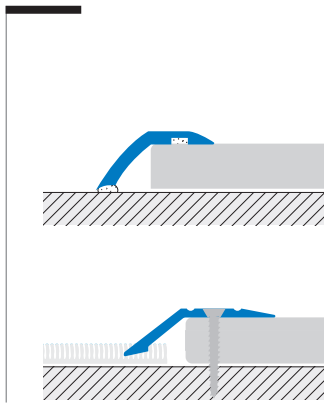


### Installation for self-adhesive version:

- 1) Check if support is sound, smooth, clean, dry and free from grease and loose materials.
- 2) Cut profile to the required length and remove the protective film.
- 3) Apply the profile by pressing on it until it is firmly fixed – do not hammer.

### Installation for pre-drilled version:

- 1) Cut profile to the required length and remove the protective film.
- 2) Insert and fix the flare head screws.

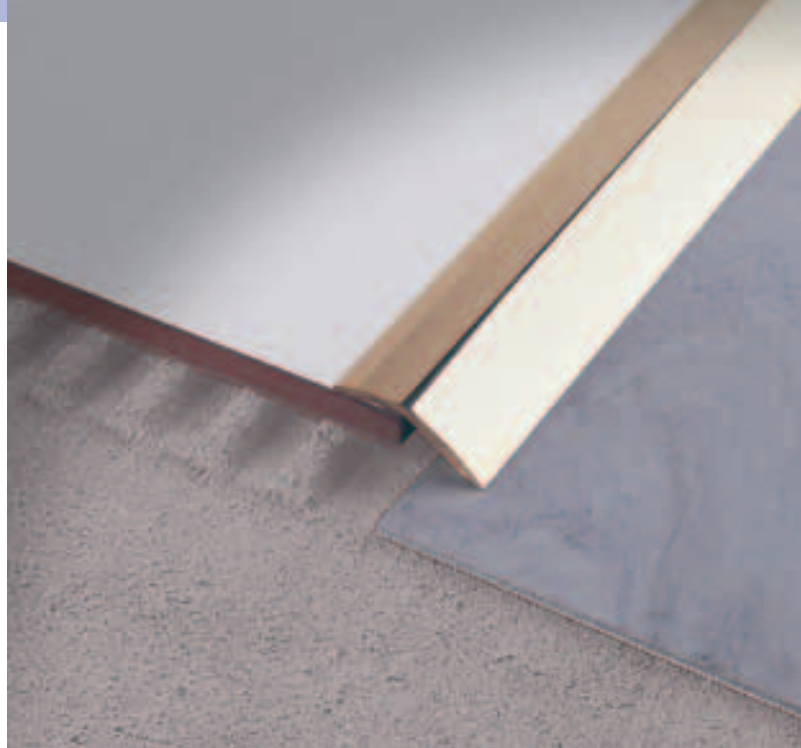

### FOLOLEVEL RP-OL\* Polished Brass

This profile is adaptable to various heights of connecting floors thanks to the availability of four different models. This profile is supplied with a polished surface.


The profile RPR 39, thanks to its reversible form can be used on both sides, joining heights from 8 to 14 mm.

Material: Extruded Polished brass

Length: 2,70 metres

Lengths ☒: 0,90 / 1,35 metres

Profile covered with a protective film strip

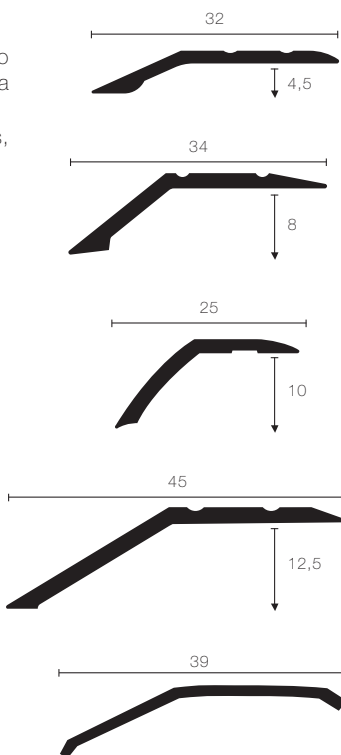


HxB	Art.	self-adhesive	drilled
4,5x32	RP 50	OLA	OLF

HxB	Art.	self-adhesive	drilled
8x34	RP 80	OLA	OLF

HxB	Art.	self-adhesive	drilled
10x25	RP 100	OLA	OLF



HxB	Art.	self-adhesive	drilled
12,5x45	RP 125	OLA	OLF

B=mm	Art.	self-adhesive	not adh.
39	RPR 39	OLA	OLN

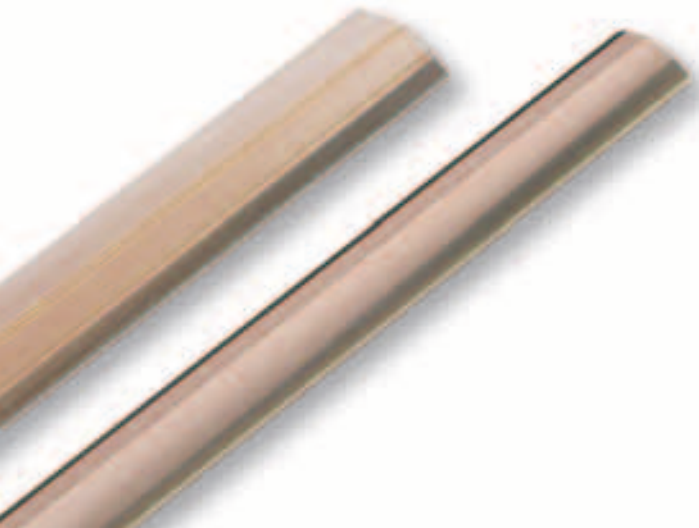


# joining profile for floors at different heights

## fololevel™ RP

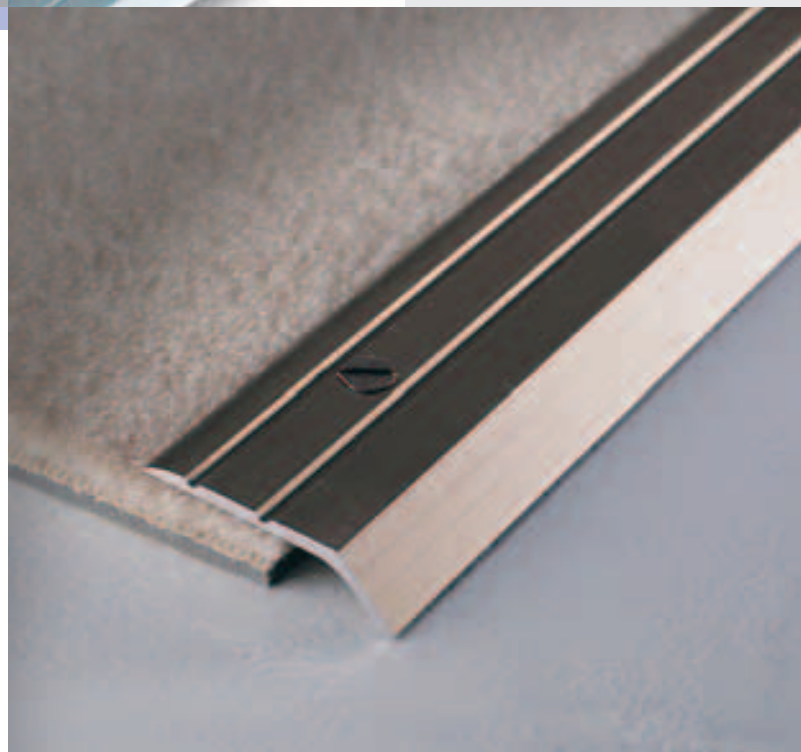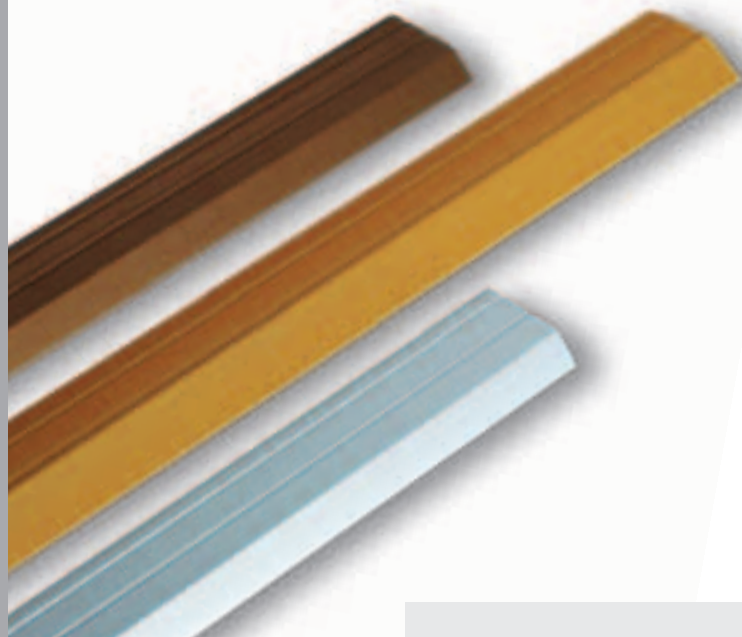

Available in different widths and heights to meet all possible needs of junction between floors at different levels, with smooth or grooved surface. Their thickness makes them suitable also for environments with high pedestrian traffic. Their shaped edges ensure a perfect contact between the profile and the floor.

Illustrated scale dimension 1:1



### FOLOLEVEL RP 50 A\* Anodised Aluminium

This aluminium version is available in three different colour finishes: Silver, Gold, Bronze and it blends well with several flooring materials utilized in domestic environments.

Material: Extruded Anodised aluminium  
Length: 2,70 metres  
Lengths : 0,90 / 1,35 metres

### FOLOLEVEL RP 80 A\* Anodised Aluminium



This top grooved aluminium version is available in three different colour finishes: Silver, Gold, Bronze and it blends well with several flooring materials utilized in domestic environments.

Material: Extruded Anodised aluminium  
Length: 2,70 metres  
Lengths : 0,90 / 1,35 metres

### FOLOLEVEL RP-IL\* Polished Stainless Steel

Stainless steel profile with a high resistance to wear and a good resistance to atmospheric agents. Available in pre-drilled or self-adhesive versions.

Material: Polished Stainless steel  
Length: 2,70 metres  
Profile covered with a protective film strip



HxB	Art.	self-adhesive drilled	
5x31	RP 50	ASA	ASF
5x31	RP 50	AOA	AOF
5x31	RP 50	ABA	ABF

HxB	Art.	self-adhesive drilled	
8x34	RP 80	ASA	ASF
8x34	RP 80	AOA	AOF
8x34	RP 80	ABA	ABF

HxB	Art.	self-adhesive drilled	
5x29	RP 50	ILA	ILF
8x34	RP 80	ILA	ILF
11x38	RP 110	ILA	ILF