

transition profile for floors to adjacent lower surfaces



FOLOROUND RD is mainly utilized for adjacent floors of different levels as for instance the joining of a ceramic floor to a thinner linoleum or other types of vinyl and resin surface. Its rounded section conveys a virtually ideal vertical drop of 3 mm to the lower adjacent floor surface and at the same time protects the tile edge with a touch of elegance, other applications are stair nosing or finishing of tiled kitchen tops and counters.

Vertical dovetail anchorage.

Illustrated scale dimension 1:1



foloround™ RD

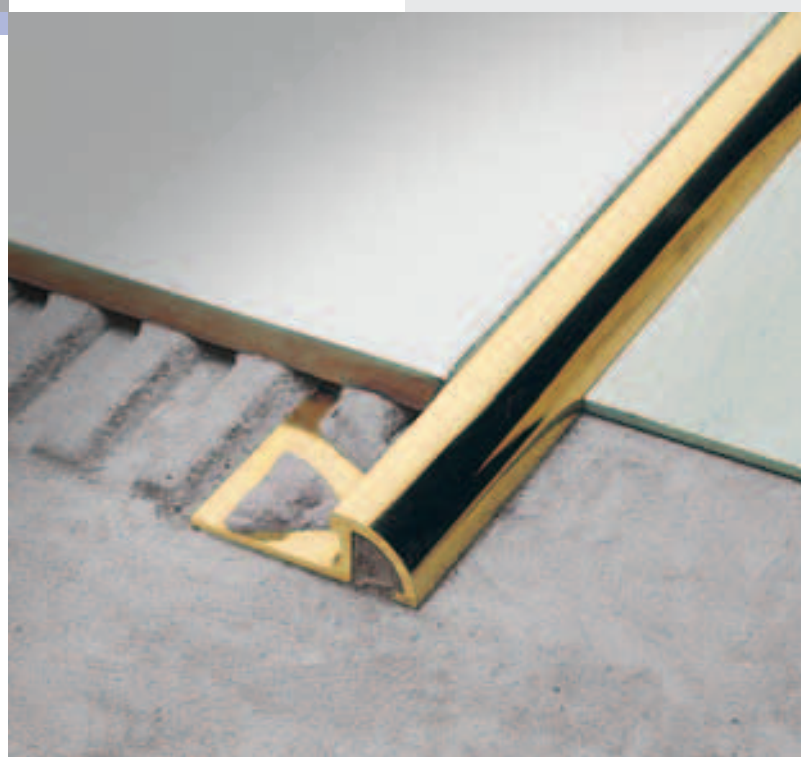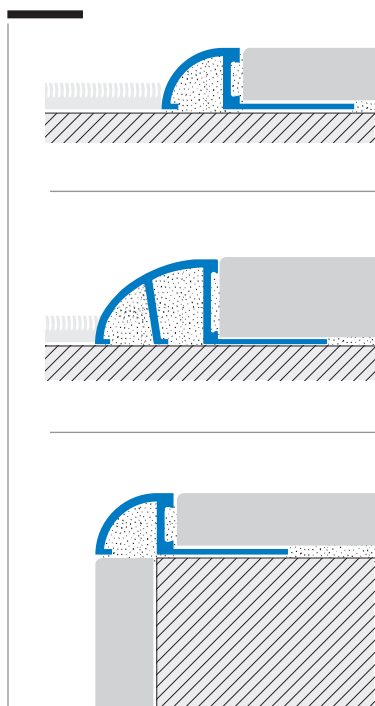

FOLOROUND RD-ON Natural Brass

This brass profile is developed with prime choice raw material in order to guarantee tolerance and endurance to chemical and mechanical solicitations. It is primarily applied on both indoor and outdoor floors and can bear intense transit areas as well as for detailing elegant residential coverings. Through contact with moisture or corrosive media, brass may oxidize on exposed surfaces. This situation can be easily solved by buffing the product with a conventional polisher to return to its original shine.

Available also in the chromed brass version, to be used only for wall covering applications. Code RD-OC.

Material: Extruded Natural brass
Lenght: 2,70 metres
Anchorage improved
on vertical side

H=mm	Art.
8	RD 80 ON
10	RD 100 ON
12,5	RD 125 ON
15	RD 150 ON