
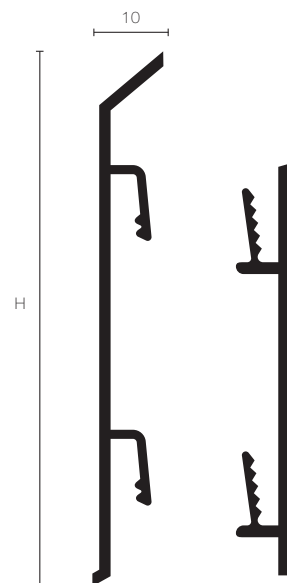


interlocking aluminium skirting board

skirting *BI*

This skirting anodised aluminium profile is easy to install and allows one to cover and protect low running cables over the perimeter providing an elegant finish to low wall corners. The internal interlocking support piece is fixed to the wall with screws. This profile is ideal for office environment for both aesthetic requirements and for telephone and computer wire passage.

Illustrated scale dimension 1:1

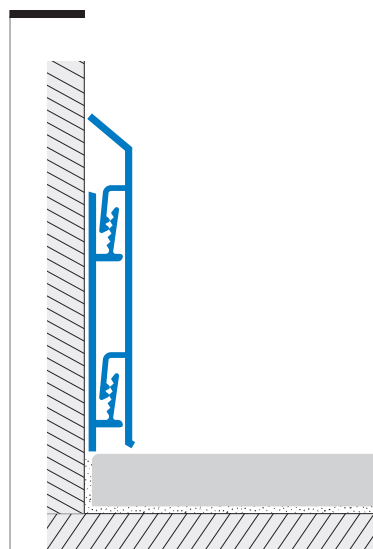

SKIRTING BI 700 ASN Silver Anodised Aluminium-interlocking H 70 mm

This anodised aluminium profile has an approx. 20 micron silver coating. Good tolerance to oxidation and to mechanical impacts. Relevant pre-drilled interlock-pieces (2 pcs per meter) to be purchased separately, code BIS 20 ANF.

Available junctions and endplugs in synthetic resin Silver colour.

This skirting board is also available powder coated with RAL colour reference.

Material: Extruded Anodised aluminium
Colour: Silver
Length: 2,00 and 4,00 meters

H=mm	Art.
70	BI 700 ASN
supports	BIS 20 ANF

SKIRTING BI 1000 ASN Silver Anodised Aluminium-interlocking H 100 mm

This anodised aluminium profile has an approx. 20 micron silver coating. Good tolerance to oxidation and to mechanical impacts. Relevant pre-drilled interlock-pieces (2 pcs per meter) to be purchased separately, code BIS 20 ANF.

Available junctions and endplugs in synthetic resin Silver colour.

This skirting board is also available powder coated with RAL colour reference.

Material: Extruded Anodised aluminium
Colour: Silver
Length: 2,00 and 4,00 meters

H=mm	Art.
100	BI 1000 ASN
supports	BIS 20 ANF