


modular along perimeter and slab casting discontinuities

jointec™ GC



Along the perimeter there must necessarily be a sufficient dilatation space. Using the joint GC, plus the soft profile GCP you will get at one go both the required level on which to place the shafts, the necessary dilatation and a nice finish of the perimeter, avoiding need of further skirting.

Thanks to its modularity, the joints GC can be coupled and mounted with the suitable PVC profile GCR, thus obtaining a double-performing control joint, with high absorption and movement qualities, as required for example in correspondence of slab casting discontinued placements.

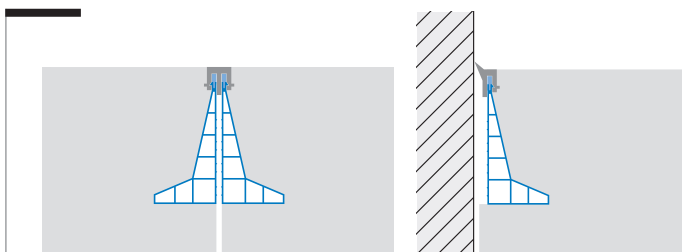

JOINTEC GCP 80 P 23 Synthetic Resin Resinflex

Profile to match with the base modul GC to form a surface perimeter joint which can replace traditional skirtings.

Material: Resinflex

Length: in rolls of 100 meters

JOINTEC GCR 80 P 23 Synthetic Resin Resinflex

Profile to mount with two base moduls GC placed back-to-back, creating a joint for breaks in the screeding.

Material: Resinflex

Length: in rolls of 100 meters

B=mm

12

Colour

Cement Grey

Art.

GCP 80 P 23

B=mm

15

Colour

Cement Grey

Art.

GCR 80 P 23