

HALFEN CAVITY TIES

LSA-W

HALFEN Cavity wall tie model LSA-W

V4A high grade stainless steel wall tie for fixing in masonry facing with or without insulation. embedment into inner leaf 50 mm (L-form) embedment into outer leaf 50 mm (wavy end) Due to the wavy end there is no need to bend it into the outer leaf.


Replaces the former L- and Z-shaped anchors with one product.

Small construction height because of the flat wave.

Time-saving installation, no post bending of waved ending needed.

Meets the requirement of DIN 1053

Material: Stainless steel W 1.4571/1.4401 (A4)

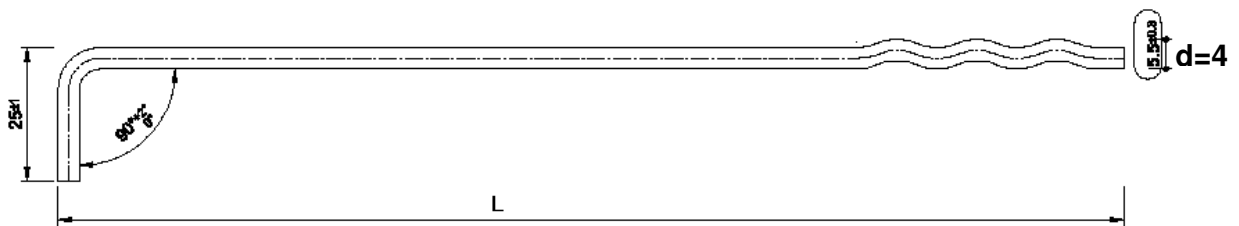

LSA-W	Cavity width to mm	L	Items per pack	Article no.
225/4	Till 100	220	250	0142.070-00001
250/4	100-125	225	250	00002
275/4	125-150	250	250	00003
300/4	150-175	275	250	00004
340/4	175-215	315	250	00005



HALFEN·DEHA

YOUR BEST CONNECTIONS

HALFEN CAVITY TIES

LSA-DW


HALFEN Cavity wall tie model LSA-DW

The cavity wall tie model ZV-Welle, approved up to cavity width of 200 mm consisting of a V4A wire anchor (stainless steel grade 316) and pre-assembled B3S plug.


The cavity wall tie model ZV-Welle, approved by the supervisory building authority Deutsches Institut für Bautechnik, can be used for subsequent facing and insulation of existing solid brick or concrete masonry.

The processing time is reduced to a minimum due to the pre-assembly of the two components. Due to the wavy end there is no need to bend the anchor into the outer leaf.

Processing mistakes are nearly impossible as a drive in pipe is included to each box and the bending of the anchor is not applicable. Meets the requirement of DIN 1053

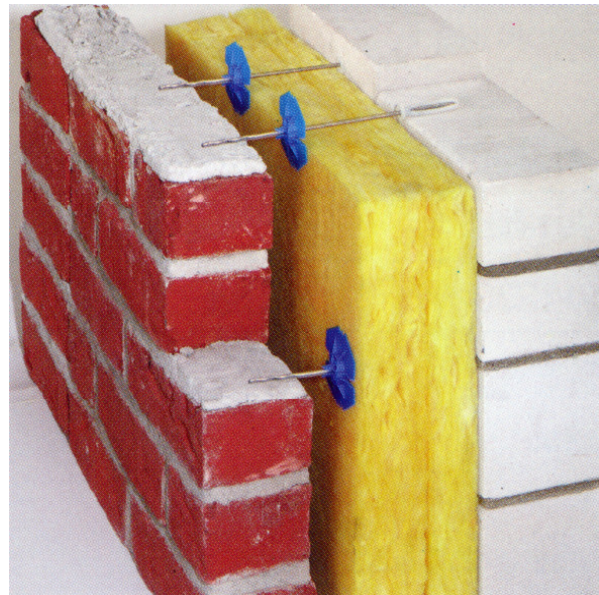

Material: Stainless steel W 1.4571/1.4401 (A4)

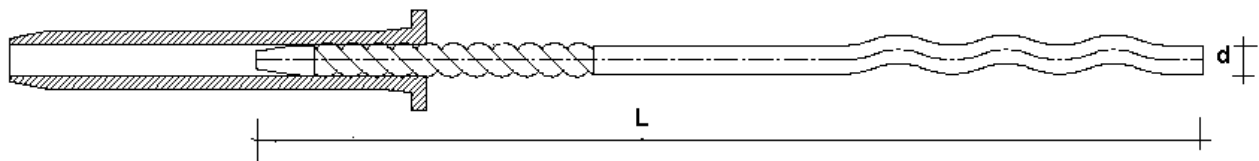

LSA-DW /d	Cavity width to mm	L	Items per pack	Article no.
160/4	Till 25	132	250	0142.080-00001
180/4	25-45	152	250	0142.080-00002
210/4	45-75	182	250	0142.080-00003
250/4	75-115	222	250	0142.080-00004
275/4	115-140	247	250	0142.080-00005
300/4	140-165	272	250	0142.080-00006
320/4	165-185	292	250	0142.080-00007
350/4	185-200	307	250	0142.080-00008



HALFEN-DEHA
YOUR BEST CONNECTIONS