



insulating matting for under wall tiling

foiltec™



Waterproofing matting in coupled polyethylene. Conceived to be laid in areas with a high presence of humidity. Suitable for vertical wall tiled coverings of shower boxes, it ensures non transmission of humidity in contiguous rooms. Laid while tiling, using a proper tile adhesive. The membrane in a soft and highly elastic material compensates as well small possible movements between the substrate and the covering, while also ensuring the non-transmission of bacteria and harmful substances.

INSTALLATION:

Prior to installation the substrate should be flat, sound, dry and free from contaminants. The mat should be cut to size prior to installation. Waterproof tile adhesive should be applied with a 3 x 3 mm toothed trowel. Press firmly with the trowel using the smooth edge to ensure a good fix to the substrate avoiding the creation of air pockets. Use the pressing roll for an improved result.

At joins overlap the matting by 5 cm or use the pre-cut FOILTEC/15 strips. For a neat finish on corners or around pipes use the preformed FOILTEC/I and FOILTEC/E internal/external corners and FOILTEC/T pipe collar.



FOILTEC / 05 matting in PE polyethylene

Bi-coupled polyethylene matting. Supplied in rolls.

Material: polyethylene coupled on two sides

FOILTEC / 14 linear junction in PE polyethylene

Pre-cut strip to make linear or corner junctions.

Material: polyethylene coupled on two sides

FOILTEC pre-formed junctions in PE polyethylene

Junctions of the same material as Foiltec matting to help installation in the most critical points, like internal and external corners.



Material: polyethylene coupled on two sides

Data	u.m.	FOILTEC / 05
Thickness	mm	0,50
Material	-	PE+PP
Height	mt.	1
Length	mt.	30


Data	u.m.	FOILTEC / 14
Thickness	mm	0,50
Material	-	PE+PP
Height	mt.	0,14
Length	mt.	20

Description	A x B	Art.
Internal corner		FOILTEC/I
External corner		FOILTEC/E
Pipe collar	120 x 120 mm	FOILTEC/T20


Foiltec Matting is provided with a complete range of accessories, to solve the different installation requirements and ensuring a good tiling job.

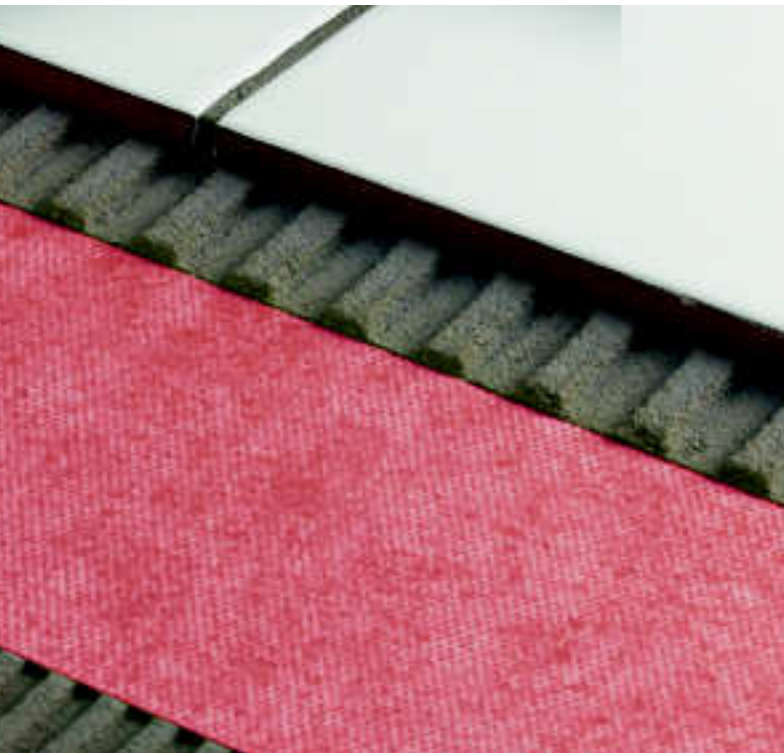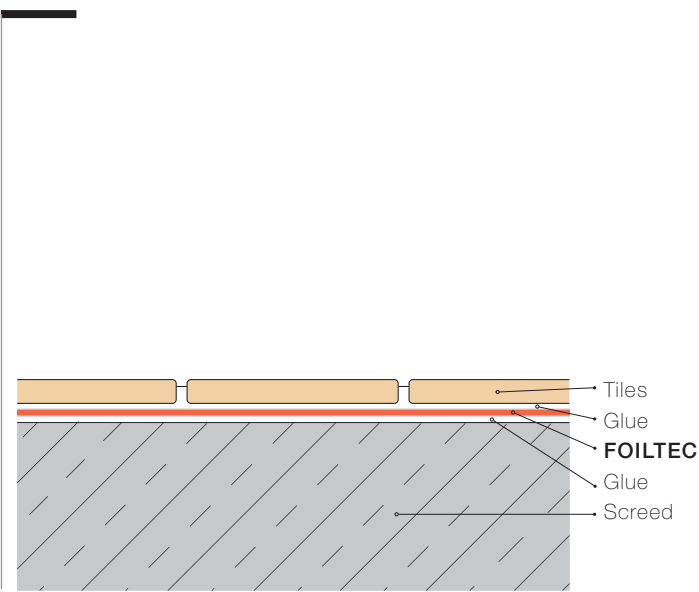

FOILTEC /15
Sealing strip for junctions.
Width: 15 cm

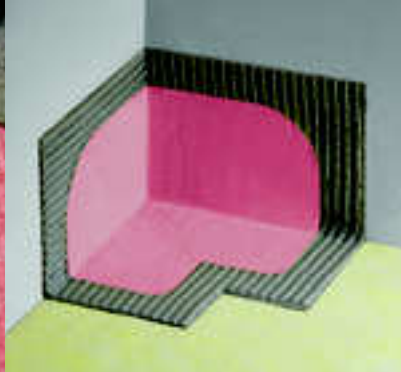

FOILTEC /I
Internal corner junction in coupled
preformed polyethylene.

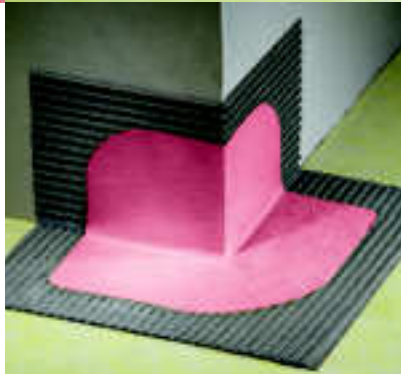

FOILTEC /E
External corner junction in coupled
preformed polyethylene.



FOILTEC /T
Pipe collar in coupled preformed
polyethylene.
T 20 for pipes diameter 20 mm